


FileMaker® Pro 13

Network Install Setup Guide

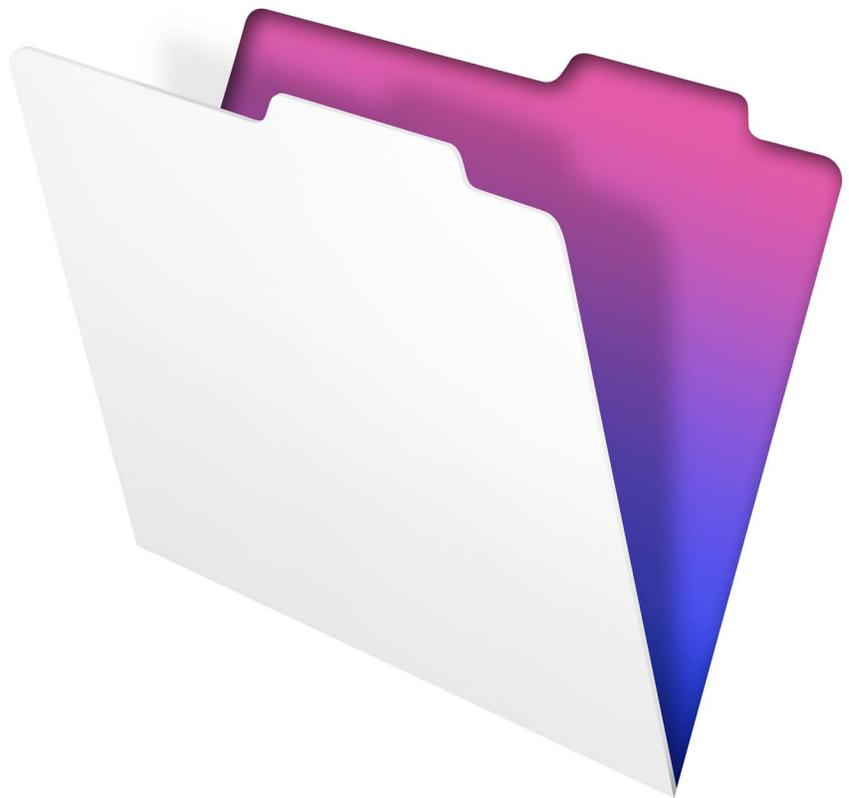

© 2007–2013 FileMaker, Inc. All Rights Reserved.

FileMaker, Inc.
5201 Patrick Henry Drive
Santa Clara, California 95054

FileMaker and Bento are trademarks of FileMaker, Inc. registered in the U.S. and other countries. The file folder logo, WebDirect, and the Bento logo are trademarks of FileMaker, Inc. All other trademarks are the property of their respective owners.

FileMaker documentation is copyrighted. You are not authorized to make additional copies or distribute this documentation without written permission from FileMaker. You may use this documentation solely with a valid licensed copy of FileMaker software.

All persons, companies, email addresses, and URLs listed in the examples are purely fictitious and any resemblance to existing persons, companies, email addresses, or URLs is purely coincidental. Credits are listed in the Acknowledgements documents provided with this software. Mention of third-party products and URLs is for informational purposes only and constitutes neither an endorsement nor a recommendation. FileMaker, Inc. assumes no responsibility with regard to the performance of these products.

For more information, visit our website at <http://www.filemaker.com>.

Edition: 01

Contents

<i>Network Install Setup Guide</i>	4
About this guide	4
Finding the license key	4
Installing FileMaker Pro in Windows	4
Choosing an installation method (Windows)	4
About installing Bonjour (Windows)	5
About installing the Microsoft .NET Framework	5
Installing FileMaker Pro using a networked volume (Windows)	6
Installing from the command line (Windows)	6
Setting up silent assisted installations (Windows)	7
Saving the license key in the (*.msi) installer (Windows)	8
Installing FileMaker Pro in OS X	9
Choosing an installation method (OS X)	9
Installing FileMaker Pro using a networked volume (OS X)	10
Installing remotely using Apple Remote Desktop (OS X)	10
About the personalization file	11
Setting personalization properties	11

Network Install Setup Guide

About this guide

This document explains how to configure the installation of FileMaker® Pro or FileMaker Pro Advanced over a network.

For information about the products or to install single copies, see *Installation and New Features Guide*. Additional PDF documentation is available at <http://www.filemaker.com/documentation>.

Your DVD or electronic download contains FileMaker Pro installers for Windows and OS X. All use of this software is subject to the terms of your license agreement.

Finding the license key

You must enter the 35-digit alphanumeric license key to install the software. You received an email message with a link to your software download page. Your license key can be found on that page.

Important If you purchased a Volume License or Site License, the license key is customized for your organization. When installing software, enter the organization name exactly as it appears on your license agreement (“Proof of License”). The organization name must be capitalized the same way it appears on your agreement.

To avoid license key verification conflicts during installation, you must use the volume license key provided by FileMaker, Inc. when performing an assisted installation or a silent assisted installation.

Installing FileMaker Pro in Windows

Before you install FileMaker Pro, make sure you have the license key ready. For more information, see “Finding the license key” above.

Note Users must have Administrator privileges to install FileMaker Pro or FileMaker Pro Advanced.

Choosing an installation method (Windows)

Before you configure your installation, decide how you want to install the software. The installation method you choose determines how the license key and other personalized information is entered when users install FileMaker Pro.

For some of the installation methods, you can edit a personalization file named Assisted Install.txt to provide the personalized information before installing the product. For more information about the personalization file, see “About the personalization file” on page 11.

Installation method	How personalization information is supplied to the installer
Interactive installation	Users provide personalization information when prompted by the installer. See <i>Installation and New Features Guide</i> .
“Installing FileMaker Pro using a networked volume (Windows)” on page 6	Edit the personalization file, Assisted Install.txt, to provide personalized information to the installer and standardize all networked FileMaker Pro or FileMaker Pro Advanced installations. This method lets you customize the installation, and eliminates the need to distribute and administer license keys. FileMaker, Inc. recommends this method.
“Installing from the command line (Windows)” on page 6	Users provide the personalized information at the command line.

Installation method	How personalization information is supplied to the installer
“Setting up silent assisted installations (Windows)” on page 7	Edit the personalization file, Assisted Install.txt, before performing a silent installation. User interaction with the FileMaker installer is kept to a minimum. The installer reads personalization information from the personalization file and installation screens do not display.
“Saving the license key in the (*.msi) installer (Windows)” on page 8	Embed the license key and personalization information directly in the installer *.msi file. The changes persist in your installer image. You don’t have to edit the personalization file and can remove it from the installer.

About installing Bonjour (Windows)

Bonjour service must be installed for databases to be broadcast and for remote databases to be detected. If Bonjour is not installed or if the Bonjour service isn’t running, users won’t be able to view hosted databases in the Open Remote File dialog box. They can manually enter IP addresses for IPv4 and IPv6 and for database names.

Bonjour can be installed only by using Setup.exe in full user interface mode or silent mode (not FileMaker Pro 13.msi or FileMaker Pro 13 Advanced.msi).

During the setup operation, one of the following will occur:

- If Bonjour isn’t detected, the installer displays an alert and prompts the user to install Bonjour.
- If a previous version of Bonjour is detected, the installer displays an alert, then prompts the user to manually uninstall the older version of Bonjour and manually install the version of Bonjour supported by FileMaker.
- If the same or a later version of Bonjour is detected, the installer does not display an alert and does not install Bonjour.

Users can also install Bonjour manually. Instruct users to open the Bonjour folder (located in the same folder as Setup.exe), then open the 32-bit or 64-bit folder depending on their system and run the Bonjour installer provided in the folder.

About installing the Microsoft .NET Framework

The Microsoft .NET Framework provides common functionality for many Windows applications. Users need to have a specific version of .NET installed on their systems for FileMaker Pro to run. If .NET is not installed, an error message appears when users start FileMaker Pro and FileMaker Pro will not run.

During the FileMaker Pro installation, the installer uses the following process:

- If the required version of .NET is detected, the installer proceeds with the FileMaker Pro installation.
- If the required version of .NET isn’t detected, the installer displays an alert that prompts the user to install .NET. The .NET installer requires Internet access to download the necessary files. If users choose not to install .NET at this time, they can install it manually later, but they will not be able to use FileMaker Pro until .NET is installed.

To install .NET manually, instruct users to:

1. Open the FileMaker Pro installation folder.
2. Open the Files folder, then open the DotNet folder.

3. Double-click the icon.
4. Follow the onscreen instructions to install .NET.

Installing FileMaker Pro using a networked volume (Windows)

To make FileMaker installation files available on your network:

1. Create an installer folder on a networked volume for the FileMaker installer files.
2. Locate the Files folder on the product DVD and copy the files to the folder you created on your networked volume.

Note If you share the electronic download or DVD over the network rather than copying installation files to a networked volume:

- Only one installer will be available—the installer for the platform of the machine running the DVD.
 - You can't use a personalization file. See "About the personalization file" on page 11.
3. To set up an assisted installation, use a text editor such as Notepad to open the personalization file, Assisted Install.txt, located in the Files folder.
 4. Edit the personalization file. See "About the personalization file" on page 11.
 5. Save changes as plain text.

To install FileMaker Pro or FileMaker Pro Advanced, instruct users to:

1. Mount the volume containing the installation files.
2. Double-click Setup.exe.
3. Windows users will see the Open File – Security Warning dialog box. Click **Run** to continue installing.

Installing from the command line (Windows)

You can install FileMaker products from the command line without using the file Assisted Install.txt. A command line installation requires you to run the Command Prompt as administrator.

1. Do one of the following:
 - Windows 7: Choose **Start** menu > **All Programs** > **Accessories**, then right-click **Command Prompt** and choose **Run as administrator**.
 - Windows 8: Right-click the start screen, select **All apps**, then right-click **Command Prompt**, and select **Run as administrator**.
2. In the Administrator: Command Prompt window, enter a command.

For example:

```
msiexec -i "FileMaker Pro.msi" AI_USERNAME="John Lee"  
AI_ORGANIZATION="FileMaker, Inc." AI_LICENSEKEY=12345-12345-12345-12345-  
12345-12345-12345
```

Property names must be capitalized. For more information, see "Setting personalization properties" on page 11.

Setting up silent assisted installations (Windows)

During a silent installation, user interaction with the FileMaker installer is kept to a minimum. Required installation information is read from the personalization file, Assisted Install.txt, and installation screens are not displayed. For information about setting up the file, Assisted Install.txt, see “About the personalization file” on page 11.

There are two ways to perform a silent installation. Users can:

- Double-click the Setup.exe file located on the mounted volume. This method requires that you modify the Setup.ini file. For more information, see the next section.
- Type the installation command and applicable options at the command line. For more information, see “Performing a silent installation using the command line” on page 7.

Modifying Setup.ini for silent installation

1. Locate the Setup.ini file in the Files folder inside the FileMaker Pro or FileMaker Pro Advanced folder.
2. Open Setup.ini using a text editor such as Notepad.
3. Locate the [Startup] section and type one of the following after **CmdLine=**

To	Add the options as shown after CmdLine=
Install a FileMaker product without a user interface (<i>silent installation</i>)	CmdLine=/q
Display a progress bar and Cancel button during installation	CmdLine=/qb+
Install FileMaker Pro or FileMaker Pro Advanced to a non-default location on the local machine	CmdLine=/qb+ INSTALLDIR=installpath

Note *Installpath* is the desired location of the FileMaker product folder on the user’s computer. The path cannot contain spaces unless it is enclosed by double quotation marks. The following example path would install into the FileMakerPro13 folder inside the Applications folder on drive C:

```
C:\Applications\FileMakerPro13
```

4. Save and close the Setup.ini file.
5. Instruct users to double-click the Setup.exe file located on the mounted volume.

Performing a silent installation using the command line

Users can install FileMaker products from the command line. When you use this method, the installer can inform users whether installation was successful. A command line silent installation requires you to run the Command Prompt as administrator.

1. Do one of the following:
 - Windows 7: Choose **Start** menu > **All Programs** > **Accessories**, then right-click **Command Prompt** and choose **Run as administrator**.
 - Windows 8: Right-click the start screen, select **All apps**, then right-click **Command Prompt**, and select **Run as administrator**.

2. In the Administrator: Command Prompt window, enter a command.

The following table describes options users have when performing an assisted installation from the command line.

To	Instruct users to open a command window, then type
Install a FileMaker product without a user interface (<i>silent installation</i>)	" <i>pathname</i> \setup.exe" /s /v/qn
Uninstall a FileMaker product without a user interface (<i>silent uninstallation</i>)	" <i>pathname</i> \setup.exe" /s /x /v/qn
Install a FileMaker product when required — advertise to current user (<i>silent advertised installation</i>)	" <i>pathname</i> \setup.exe" /s /v /ju
Install a FileMaker product when required — advertise to all users (<i>silent advertised installation</i>)	" <i>pathname</i> \setup.exe" /s /v /jm
Display a dialog box indicating whether the FileMaker product was successfully installed	" <i>pathname</i> \setup.exe" /s /v/qn+
Display a progress bar and Cancel button during installation	" <i>pathname</i> \setup.exe" /s /v/qb+
Install FileMaker Pro to a non-default location on your local machine	" <i>pathname</i> \setup.exe" /s /v"/qb+ INSTALLDIR="\ <i>installpath</i> \FileMaker Pro 13\""
Install FileMaker Pro Advanced to a non-default location on your local machine	" <i>pathname</i> \setup.exe" /s /v"/qb+ INSTALLDIR="\ <i>installpath</i> \FileMaker Pro 13 Advanced\""

Notes

- *Pathname* is the location of the installer directory you created on the networked volume.
- *Installpath* is the desired location of the FileMaker product folder on the user's computer. The path cannot contain spaces unless it is enclosed by double quotation marks.
- The installer may reboot the computer if required.

Saving the license key in the (*.msi) installer (Windows)

You can embed the license key and personalization information in the *.msi installer. If you choose this method, make sure that you make no other changes to the *.msi file. For information about Orca, see <http://www.microsoft.com>.

1. Use Orca to open FileMaker Pro 13.msi.
2. In the Property table, enter required values for **AI_USERNAME**, **AI_ORGANIZATION**, and **AI_LICENSEKEY**.
See "Setting personalization properties" on page 11.
3. Save the FileMaker Pro 13.msi file.
4. Instruct users to run the installer using the command line or by double-clicking the Setup.exe file located on the mounted volume.

Installing FileMaker Pro in OS X

Before you install FileMaker Pro, make sure you have the license key ready. For more information, see “Finding the license key” on page 4.

Note Users must have Administrator privileges to install FileMaker Pro or FileMaker Pro Advanced.

Choosing an installation method (OS X)

Before you configure your installation, decide how you want to install the software. The installation method you choose determines how the license key and other personalized information are entered when users install FileMaker Pro.

For some of the installation methods, you can edit a personalization file named Assisted Install.txt to provide the personalized information before installing the product. For more information about the personalization file, see “About the personalization file” on page 11.

Installation method	How personalization information is supplied to the installer
Interactive installation	Users provide personalization information when prompted by the installer. See <i>Installation and New Features Guide</i> .
“Installing FileMaker Pro using a networked volume (OS X)” on page 10	Edit the personalization file, Assisted Install.txt, to provide personalized information to the installer and standardize all networked FileMaker Pro or FileMaker Pro Advanced installations. This method lets you customize the installation, and eliminates the need to distribute and administer license keys. FileMaker, Inc. recommends this method.
“Installing remotely using Apple Remote Desktop (OS X)” on page 10	Edit the personalization file, Assisted Install.txt, to provide personalized information, then run a script to create a personalized .pkg file before installing the software using Apple Remote Desktop.

Installing FileMaker Pro using a networked volume (OS X)

To make FileMaker installation files available on your network, first create a disk image (.dmg file) for the installation files, then copy the disk image to your networked volume.

1. Create an installer folder on your computer for the FileMaker installer files.
2. Locate the following files on the product DVD and copy them to the installer folder:
 - The FileMaker Pro 13.pkg or FileMaker Pro 13 Advanced.pkg installer application
 - The personalization file Assisted Install.txt
 - The registration tool (Registration.app)
3. To set up an assisted installation, use a text editor such as TextEdit to open the file Assisted Install.txt.
4. Edit the personalization file. See “About the personalization file” on page 11.
5. Save the changes you have made to the file, Assisted Install.txt, as plain text.
6. Create a disk image for the installer folder that contains the installer application, the personalization file, and the registration tool. For more information about creating disk images, see OS X Help Center.
7. Copy the new installer disk image (.dmg file) to your networked volume.

Note In OS X, the installer installs the FileMaker product to use the same language as the current OS X system language. Users who want to install the FileMaker product with a different language should use the Language & Text pane of System Preferences to change the OS X language prior to installing the FileMaker product.

To install FileMaker Pro or FileMaker Pro Advanced, instruct users to:

1. Mount the volume containing the installation files.
2. Double-click the disk image (*.dmg file) on the networked volume.
3. Double-click the FileMaker Pro 13.pkg or FileMaker Pro 13 Advanced.pkg installer application.

Installing remotely using Apple Remote Desktop (OS X)

You can install FileMaker Pro remotely using Apple Remote Desktop. For more information about remote installations, see the Apple Remote Desktop Help.

After you edit the file, Assisted Install.txt, you can create a personalized .pkg file compatible with Apple Remote Desktop.

1. Follow steps 1-5 in “Installing FileMaker Pro using a networked volume (OS X)” to set up the installer folder and personalization file.
2. Download the Apple Remote Desktop Deployment script for FileMaker Pro. The script can be found in the fmp_osx_deployment.zip file located at <http://www.filemaker.com/documentation>.
3. Double-click the fmp_osx_deployment.zip file to extract the Apple Remote Desktop Deployment script (AppleRemoteDesktopDeployment.sh).
4. Open a Finder window, then choose **Go** menu > **Utilities**.

5. Double-click **Terminal** from the list of utilities.
6. Type `cd "<path to script>"`, then press Return.
7. Type `sudo chmod +x ./AppleRemoteDesktopDeployment.sh`, then press Return.
When prompted to provide a password, enter an Administrator password.
8. Type `./AppleRemoteDesktopDeployment.sh "<path to installer folder>"`, then press Return.

The script creates a personalized .pkg file in the installer folder that you can use with Apple Remote Desktop.

About the personalization file

An assisted installation eases installation of FileMaker Pro or FileMaker Pro Advanced in a multiple computer environment. You enter information required by the installer in a personalization file (such as a generic user name, organization name, license key, and installation options), then make the file available on your network, and FileMaker Pro installs without user intervention.

The personalization file, Assisted Install.txt, is used by the FileMaker installers to install FileMaker Pro or FileMaker Pro Advanced on computers in your organization. Users can perform an assisted installation in Windows or in OS X, but the Assisted Install.txt files are platform-specific and can not be interchanged.

Note Prior to FileMaker Pro 7, the personalization file was named FileMaker Pro x.pdf. This is not an Adobe PDF file. It is a plain text file that conforms to the Microsoft Package Definition File format. This file still exists and is required for mass deployment of FileMaker Pro via the Microsoft System Center Configuration Manager (SCCM). You should not edit this file unless you are using SCCM for installation. In that case, after creating the installer package, open the FileMaker Pro x.pdf properties. In the **General** tab, for **Command line**, type `Setup.exe /S/v/qn`, click **OK**, then perform the installation.

Setting personalization properties

This section explains the properties and variables in the personalization file, Assisted Install.txt.

Note Property names (AI_*) must be capitalized. Variable settings are not case-sensitive, except for organization names. (See the description for AI_ORGANIZATION.)

To	Do this
Enter a user name for all installations	Type a name after AI_USERNAME= If you leave this variable blank, the installer defaults to the name that was used to register Windows (Windows) or the account user name (OS X).
Enter a company name for all installations	Type a name after AI_ORGANIZATION= If you purchased a Volume License or Site License, type the organization name exactly as it appears on your license agreement ("Proof of License"). The organization name must be capitalized the same way it appears in your agreement. Windows: If you leave this variable blank, the installer defaults to the name that was used to register Windows.

To	Do this
Enter a valid license key for all installations	Type your license key after AI_LICENSEKEY= For information about the license key, see “Finding the license key” on page 4.
Windows: Specify the language version of the FileMaker product. This setting only works when users perform a silent assisted installation. See “Setting up silent assisted installations (Windows)” on page 7.	Type the name of the language after AI_LANGUAGE= Valid entries are: BrazilianPortuguese, Chinese Simplified, Dutch, English, French, German, Italian, Japanese, Korean, Spanish, or Swedish. OS X: Do not specify a language setting. The FileMaker installer uses the current language setting from your operating system.
Windows: Specify whether the FileMaker product is available to all users or to the current user only	Type one of the following after AI_APPLICATIONUSERS= <ul style="list-style-type: none"> ▪ AllUsers to make the FileMaker product available to any user logged in on this computer. ▪ OnlyCurrentUser to restrict use of the FileMaker product to the user account that is logged on during installation.
Prevent or allow users to create new databases	Type one of the following after AI_NONEWDATABASES= <ul style="list-style-type: none"> ▪ 1 (one) to prevent users from creating databases. ▪ 0 (zero) to allow users to create databases. For more information, see “Preventing users from creating databases” on page 14.
Windows: Create a shortcut for the FileMaker product on the desktop and in the Quick Launch toolbar	Type one of the following after AI_SHORTCUTS= <ul style="list-style-type: none"> ▪ 1 (one) to create a shortcut. ▪ 0 (zero) if you don’t want to create a shortcut. See the note at the end of this table for more information.
Suppress or display electronic registration	Type one of the following after AI_REGISTRATION= <ul style="list-style-type: none"> ▪ 0 (zero) to suppress electronic registration. Your FileMaker product won’t prompt users to enter registration information. ▪ 1 (one) to display an electronic registration reminder.
Suppress or display the personalization dialog box during installation	Type one of the following after AI_SKIPDIALOG= <ul style="list-style-type: none"> ▪ 1 (one) to suppress the personalization dialog box. Users don’t have to enter a name or organization, and they don’t see the license key. (If the key you entered is invalid, the personalization dialog box displays.) ▪ 0 (zero) to display the personalization dialog box during installation. See the note after this table for more information.
Disable or enable the Update Notification dialog box during installation	Type one of the following after AI_DISABLEUPDATENOTIFY= <ul style="list-style-type: none"> ▪ 1 (one) to disable the Update Notification dialog box. Users will not be notified when a software update is available. In addition, the following items will not be available in the FileMaker product: Help menu > Check for Updates and the General Preferences option. ▪ 0 (zero) to enable the Update Notification dialog box. Users will be notified at startup when a software update is available. This is the default setting. For more information on update notification, see <i>Installation and New Features Guide</i> .
Disable or enable the New Version Notification dialog box during installation	Type one of the following after AI_DISABLEVERSIONNOTIFY= <ul style="list-style-type: none"> ▪ 1 (one) to disable the New Version Notification dialog box. Users will not be notified when a new version of the software is available. ▪ 0 (zero) to enable the New Version Notification dialog box. Users will be notified at startup when a new version of the software is available. This is the default setting.

To	Do this
Prevent or allow plug-ins to be installed by solution files	<p>Type one of the following after AI_DISABLEPLUGINS=</p> <ul style="list-style-type: none"> 1 (one) to disable the Allow Solutions to Install Files option in the Plug-ins preferences, which prevents plug-ins from being installed. 0 (zero) to allow plug-ins to be installed. <p>Note Some solution files may require plug-ins to work properly. For more information, contact the solution developer.</p> <p>For more information about installing and updating plug-ins, see Help.</p>
Hide or show the Enable ODBC/JDBC command	<p>Type one of the following after AI_DISABLEXDBC=</p> <ul style="list-style-type: none"> 1 (one) to hide the File menu > Sharing > Enable ODBC/JDBC command in FileMaker Pro installations. 0 (zero) to show the File menu > Sharing > Enable ODBC/JDBC command in FileMaker Pro installations.
Hide or show the Configure for FileMaker WebDirect command	<p>Type one of the following after AI_DISABLEIWP=</p> <ul style="list-style-type: none"> 1 (one) to hide the File menu > Sharing > Configure for FileMaker WebDirect command in FileMaker Pro installations. 0 (zero) to show the File menu > Sharing > Configure for FileMaker WebDirect command in FileMaker Pro installations.

Note Windows: The **AI_SHORTCUTS** and **AI_SKIPDIALOG** properties determine whether the installer prompts the user to create a shortcut.

AI_SHORTCUTS=	AI_SKIPDIALOG=	Result
1	1	No prompt. Creates shortcut.
0	1	No prompt. Doesn't create shortcut.
1	0	A dialog box is displayed. The options for creating shortcuts will be selected in the dialog box.
0	0	A dialog box is displayed. The options for creating shortcuts will not be selected in the dialog box.

Preventing users from creating databases

You can set a property, `AI_NONEWDATABASES`, that prevents users from creating FileMaker databases. If the option is set, the FileMaker product displays an alert message when users do the following:

- Choose **File** menu > **New Database**.
- Create a database from the FileMaker Quick Start Screen.
- Export to a FileMaker Pro file.
- Choose **File** menu > **Save a Copy As**.
- Open the New Database dialog box.
- Recover a FileMaker Pro file.
- Convert another file format (like tab-delimited) into a new FileMaker Pro file, for example, by choosing **File** menu > **Open**.
- Execute an Apple event to open a file in another format.
- Execute the Apple events **do menu** command to create a file.
- Perform a script that does any of the above.
- Choose a custom menu item that does any of the above.

To create databases, users must reinstall the FileMaker software with the `AI_NONEWDATABASES` variable set to 0.