


FileMaker® Pro 13

Advanced

Database Design Report
XML Output Grammar

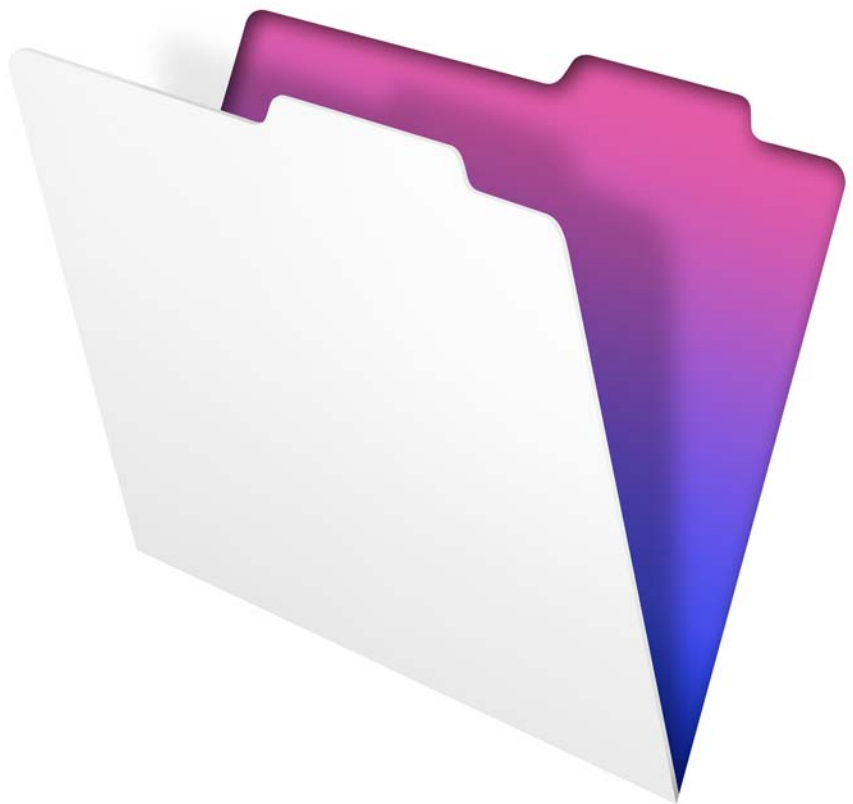

© 2004–2013 FileMaker, Inc. All Rights Reserved.

FileMaker, Inc.
5201 Patrick Henry Drive
Santa Clara, California 95054

FileMaker and Bento are trademarks of FileMaker, Inc. registered in the U.S. and other countries. The file folder logo, FileMaker WebDirect, and the Bento logo are trademarks of FileMaker, Inc. All other trademarks are the property of their respective owners.

FileMaker documentation is copyrighted. You are not authorized to make additional copies or distribute this documentation without written permission from FileMaker. You may use this documentation solely with a valid licensed copy of FileMaker software.

All persons, companies, email addresses, and URLs listed in the examples are purely fictitious and any resemblance to existing persons, companies, email addresses, or URLs is purely coincidental. Credits are listed in the Acknowledgements documents provided with this software. Mention of third-party products and URLs is for informational purposes only and constitutes neither an endorsement nor a recommendation. FileMaker, Inc. assumes no responsibility with regard to the performance of these products.

For more information, visit our website at <http://www.filemaker.com>.

Edition: 01

Database Design Report XML Output Grammar

This document describes the FileMaker® Pro 13 Advanced Database Design Report (DDR) XML output grammar. The DDR XML format is useful for advanced users and developers who want to create tools that analyze or process the structure of databases.

Table of Contents

Overview (Summary) Section	3
General Section	5
File Reference Section.....	6
Base Table Section.....	7
Base Directory Section.....	15
Relationship Section.....	15
Value List Section.....	18
Layout Section	19
Account Section	40
Privilege Set Section.....	41
Extended Privilege Section	46
Authorized Files Section.....	46
Custom Menu Set Section.....	47
Custom Menu Section	48
Custom Function Section.....	50
Script Section	51
Theme Catalog Section	104

Overview (Summary) Section

Tag Name	Value	Description
<FMReport	—	The top most parent node.
type="Summary"	Can have one of the following values: <ul style="list-style-type: none">■ Summary■ Report	Stores the type of the XML report file. This value is used by the XSL file to determine if we are in summary mode or report mode.
version="13.0v1"	FMPro Advanced version/vrev	Version/vrev of FileMaker Pro Advanced that generated this report.
creationDate="1/1/2014"	Date string based on the system's locale	Contains the creation date of the report.
creationTime="2:00 pm">	Time string based on the system's locale	Contains the creation time of the report.

Tag Name	Value	Description
<FMPReport><File	—	XML node that contains the information about the database file report such as the original filename, the path of the report directory and the XML report filename.
name="testfile.fmp12"	Valid filename based on the OS platform	No validation is performed in the text string content. It is only used for display.
path="C:\test\"	Platform specific file path	Path of the XML report file of the database file.
link="testfile_fmp12.xml">	Valid filename based on the OS platform	Contains the XML detail report filename.
<FMPReport><File><BaseTables count="2">	Any numeric value	Shows the number of base tables found in the database referenced under <File name> attribute.
<FMPReport><File><Tables count="2">	Any numeric value	Shows the number of tables (occurrences) found in the database referenced under <File name> attribute.
<FMPReport><File><Accounts count="2">	Any numeric value	Shows the number of user accounts found in the database referenced under <File name> attribute.
<FMPReport><File><Privileges count="2">	Any numeric value	Number of privilege sets found in the database referenced under <File name> attribute.
<FMPReport><File><ExtendedPrivileges count="4">	Any numeric value	Number of extended privileges found in the database referenced under <File name> attribute.
<FMPReport><File><Layouts count="2">	Any numeric value	Number of layouts found in the database referenced under <File name> attribute.
<FMPReport><File><Scripts count="2">	Any numeric value	Number of scripts found in the database referenced under <File name> attribute.
<FMPReport><File><Relationships count="2">	Any numeric value	Number of relationships found in the database referenced under <File name> attribute.
<FMPReport><File><ValueLists count="2">	Any numeric value	Number of value lists found in the database referenced under <File name> attribute.
<FMPReport><File><CustomFunctions count="2">	Any numeric value	Number of custom functions found in the database referenced under <File name> attribute.
<FMPReport><File><FileReferences count="2">	Any numeric value	Number of file references found in the database referenced under <File name> attribute.
<FMPReport><File><CustomMenuSets count="2">	Any numeric value	Number of custom menu sets found in the database referenced under <File name> attribute.
<FMPReport><File><CustomMenus count="2">	Any numeric value	Number of custom menus found in the database referenced under <File name> attribute.

General Section

Tag Name	Value	Description
<FMPReport	—	The top most parent node.
type="Report"	Can have one of the following values: <ul style="list-style-type: none"> ■ Summary ■ Report 	Stores the type of the XML report file. This value is used by the XSL file to determine if we are in summary mode or report mode.
version="13.0v1"	FMPPro Advanced version/vrev	Version/vrev of FileMaker Pro Advanced that generated this report.
creationDate="1/1/2014"	Date string based on the system's locale	Contains the creation date of the report.
creationTime="2:01 pm"	Time string based on the system's locale	Contains the creation time of the report.
link="Summary.xml" >	Valid filename based on the OS platform	Contains the XML summary report filename.
<FMPReport><File	—	XML node that contains the information about the database file report such as the original filename and the path of the report directory.
name="testfile.fmp12"	Valid filename based on the OS platform	No validation is performed in the text string content. It is only used for display.
path="D:\Location" />	Platform specific file path	Path of the XML report file of the database file.
<FMPReport><File><Options>	—	File specific options of the database file.
<FMPReport><File><Options><OnOpen>	—	Applicable options when the database file is opened.
<FMPReport><File><Options><OnOpen><Account name="PowerUsers">	—	The account used on File Open.
<FMPReport><File><Options><OnOpen><Script name="MyScript" id="123" >	—	This element exists when there is a script specified to be performed on File Open.
<FMPReport><File><Options><OnOpen><Layout name = "MyLayout" id="431" >	—	This element exists when there is a layout specified to be switched to on File Open.
<FMPReport><File><Options><DefaultCustomMenuSet>	—	
<FMPReport><File><Options><DefaultCustomMenuSet><CustomMenuSet name="menu set 1" id="2">	—	This element exists when there is a default custom menu set specified to be switched to.
<FMPReport><File><Options><OnClose>	—	Applicable options when the database file is closed.
<FMPReport><File><Options><OnClose><Script name="MyCloseScript" id="222" >	—	This element exists when there is a script specified to be performed on Close File.
<FMPReport><File><Options><Encryption type="0">	When the type property's value is "0", the file is not encrypted. When the type property's value is "1", the file is encrypted (AES256).	This element represents the encryption state of the file.

File Reference Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<FileReferenceCatalog>	—	XML node for catalog of file references and data sources.
<FileReferenceCatalog><FileReference	—	XML node for the file reference.
name="Report"	Any valid file reference name	—
id = "1"	Internal unique positive integer value indicating creating order	—
link="file2_fmp12.xml"	Valid filename based on the OS platform	Contains the external XML detail report filename.
pathList="C:\path\">	Valid path list strings	Each path is separated by the carriage return character.
<FileReferenceCatalog><OdbcDataSource	—	XML node for data source.
id="1"	Key of data source	—
name="Report"	Any valid name	—
link="file2_fmp12.xml"	Valid filename based on the OS platform	Contains the XML detail report filename.
DSN="..."	Any valid string	Name of DSN that's used.
promptForLogin="False"	Can have one of the following values: ■ True ■ False	Determines if user should be prompted for login credentials.
useSso="True"	Can have one of the following values: ■ True ■ False	Indicates whether user is using single sign-on or not.
<FileReferenceCatalog><OdbcDataSource><ssoSpn>	—	If using single sign-on, then this is the name that the user provides.
<FileReferenceCatalog><OdbcDataSource><Username>	—	Login username calc. Optional, exists only if data source has entered user name.
<FileReferenceCatalog><OdbcDataSource><Username><Calculation>...	—	XML node for calculation, same as in the rest of the grammar.
<FileReferenceCatalog><OdbcDataSource><Username><DisplayCalculation>...	—	XML display calculation node, same as in the rest of the grammar.
<FileReferenceCatalog><OdbcDataSource><Password>	—	Login password calc. Optional, exists only if data source has entered password.
<FileReferenceCatalog><OdbcDataSource><Password><Calculation>...	—	XML node for calculation, same as in the rest of the grammar.
<FileReferenceCatalog><OdbcDataSource><Password><DisplayCalculation>...	—	XML display calculation node, same as in the rest of the grammar.
<FileReferenceCatalog><OdbcDataSource><FilterTables	—	—

Tag Name	Value	Description
tableName="table"	Any valid text string	The table name to filter for. Optional, defaults to blank.
schemaName="schema"	Any valid text string	The schema name to filter for. Optional, defaults to blank.
catalogName="catalog"	Any valid text string	The catalog name to filter for. Optional, defaults to blank.
typeBasedFilter="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Attribute indicates if data source filters on object type, specifically identified below. Optional, defaults to False.
retrieveTables="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Attribute indicates if tables should be retrieved. Optional, defaults to False.
retrieveViews="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Attribute indicates if views should be retrieved. Optional, defaults to False.
retrieveSystemTables="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Attribute indicates if system tables should be retrieved. Optional, defaults to False.

Base Table Section

Tag Name	Value	Description
<FMPReport><File><BaseTableCatalog>	—	XML node for catalog of (base) table definitions.
<FMPReport><File><BaseTableCatalog><BaseTable	—	XML node for the (base) table definition.
name="Table1"	Any valid table name	—
shadow="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates whether or not this table is a shadow table.
id="1"	Internal unique positive integer value indicating creating order	—
records="12">	Stores the record numbers of a table	—
<FMPReport><File><BaseTableCatalog><BaseTable><DataSourceRef	—	A reference to the data source associated with this table. Only available if the "shadow" attribute of the parent BaseTable is "True".
name="..."	Any valid string	The name of the data source (data source names are unique).

Tag Name	Value	Description
catalogName="catalog"	Any valid string	The name of the remote table's catalog in the ODBC data source.
schemaName="schema"	Any valid string	The name of the remote table's schema in the ODBC data source.
tableName="table">	Any valid string	The name of the remote table's table name in the ODBC data source.

All nodes below start with <FMPReport><File><BaseTableCatalog><BaseTable>

Tag Name	Value	Description
<FieldCatalog>	—	XML node for catalog of fields.
<FieldCatalog><Field	—	XML node for a field.
name="Field1"	Any valid field name	—
id="1"	Internal unique positive integer value indicating creating order	—
fieldType="Normal"	Can have one of the following values: <ul style="list-style-type: none"> ■ Normal ■ Calculated ■ Summary ■ Invalid 	Indicates the field type.
shadowType="Supplemental"	Can have one of the following values: <ul style="list-style-type: none"> ■ Shadow ■ Supplemental 	Specifies the shadow field type. Only available if the parent BaseTable's "shadow" attribute is "True".
dataType="Binary">	Can have one of the following values: <ul style="list-style-type: none"> ■ Text ■ Number ■ Date ■ Time ■ TimeStamp ■ Binary 	Indicates what kind of data is stored in the field.
<FieldCatalog><Field><Calculation	—	XML node for a calculation.
alwaysEvaluate="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Attribute indicates if calculation is always evaluated. This attribute is applicable to calculation in field definitions only.
table="Table1">	Valid table name	Indicates the context table of the calculation. This attribute is applicable to auto-enter calculation only.
<FieldCatalog><Field><Calculation><![CDATA[F1]]>	CDATA containing the calculation text	—
<FieldCatalog><Field><DisplayCalculation>	—	XML node for a calculation. This XML node is for display purposes only. Basically, it breaks a calculation into sequential chunks.

Tag Name	Value	Description
<FieldCatalog><Field><DisplayCalculation><Chunk type="FieldRef">	Can have one of the following values: <ul style="list-style-type: none"> FunctionRef FieldRef NoRef CustomFunctionRef 	Chunk type. FunctionRef indicates that the chunk is a calculation function. FieldRef indicates that the chunk is a field. NoRef indicates that the chunk has no special references, but is just ordinary text. CustomFunctionRef indicates that the chunk is a custom function.
<FieldCatalog><Field><DisplayCalculation><Chunk><Field	—	XML node for a field.
name = "F1"	Valid field name	—
id = "2"	Internal unique positive integer value indicating creating order	—
table = "Customer1"	Table occurrence name	—
repetition = "2"	If repetition is "1", then it is implicit, no need to output it.	—
shadowType="Supplemental">	Can have one of the following values: <ul style="list-style-type: none"> Shadow Supplemental 	Specifies the shadow field type. Only available if the parent BaseTable's "shadow" attribute is "True".
<FieldCatalog><Field><SummaryInfo	—	XML node for field summary.
operation="Total"	Can have one of the following values: <ul style="list-style-type: none"> Total RunningTotal Average WeightedAverage Count RunningCount Minimum Maximum StdDeviation StdDeviationByPopulation Fractional FractionalSubtotal List of 	Summary operation.
summarizeRepetition="Individually"	Can have one of the following values: <ul style="list-style-type: none"> Together Individually 	Summarize repetition property.
restartForEachSortedGroup="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	This attribute is applicable only if the operation is RunningTotal or RunningCount.
<FieldCatalog><Field><SummaryInfo><SummaryField>	—	XML node representing the field to summarize.
<FieldCatalog><Field><SummaryInfo><SummaryField><Field	—	XML node for a field.
name="Field2"	Valid field name	—

Tag Name	Value	Description
id = "2"	Internal unique positive integer value indicating creation order	—
shadowType="Supplemental">	Can have one of the following values: <ul style="list-style-type: none"> Shadow Supplemental 	Specifies the shadow field type. Only available if the parent BaseTable's "shadow" attribute is "True".
<FieldCatalog><Field><SummaryInfo><AdditionalField>	—	XML node representing the additional field to summarize.
<FieldCatalog><Field><SummaryInfo><AdditionalField><Field	—	—
name="Field2"	Valid field name	—
id = "2"	Internal unique positive integer value indicating creation order	—
table="Table1"	Table occurrence name	—
repetition="2"	If repetition is "1", then it is implicit, no need to output it.	—
shadowType="Supplemental">	Can have one of the following values: <ul style="list-style-type: none"> Shadow Supplemental 	Specifies the shadow field type. Only available if the parent BaseTable's "shadow" attribute is "True".
<FieldCatalog><Field><Comment>	Any text string.	XML node containing the comment information of a field definition.
<FieldCatalog><Field><AutoEnter	—	XML node representing the auto-enter information of a field.
value="CreationDate"	Can have one of the following values: <ul style="list-style-type: none"> CreationTime CreationDate CreationTimeStamp CreationName CreationAccountName ModificationDate ModificationTime ModificationTimeStamp ModificationName ModificationAccountName PreviousRecord ConstantData 	Auto-enter type.
allowEditing="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if user is prohibited from modifying field value during data entry.
calculation="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if the auto-enter calculation is applicable.

Tag Name	Value	Description
lookup="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if the auto-enter lookup information is applicable.
furigana="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if the Furigana information is applicable.
alwaysEvaluate="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if calculation is always evaluated. This attribute is applicable to calculation in field definitions only.
constant="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute indicates if the constant data information is applicable.
<FieldCatalog><Field><AutoEnter><Serial	—	Auto-enter serial information.
generate="OnCommit"	Can have one of the following values: <ul style="list-style-type: none"> OnCommit OnCreation 	Auto-enter serial generate type.
nextValue="1"	A float.	Next value.
increment="2" >	Positive integer value in the range [1, 32767]	Increment value.
<FieldCatalog><Field><AutoEnter><ConstantData>	Any valid text string	Auto-enter data.
<FieldCatalog><Field><AutoEnter><Calculation	—	XML node for a calculation.
table="Table2">	Valid table name	Indicates the context table of the calculation. This attribute is applicable to auto-enter calculation only.
<FieldCatalog><Field><AutoEnter><Calculation><![CDATA[field1]]>	CDATA containing the calculation text	—
<FieldCatalog><Field><AutoEnter><DisplayCalculation>	—	XML node for a calculation. This XML node is for display purposes only. Basically, it breaks a calculation into sequential chunks.
<FieldCatalog><Field><AutoEnter><DisplayCalculation><Chunk type="NoRef">	Can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	Chunk type. FunctionRef indicates that the chunk is a calculation function. FieldRef indicates that the chunk is a field. NoRef indicates that the chunk has no special references, but is just ordinary text. CustomFunctionRef indicates that the chunk is a custom function.
<FieldCatalog><Field><AutoEnter><Lookup>	—	XML node containing the auto-enter lookup information.
<FieldCatalog><Field><AutoEnter><Lookup><Table	—	Table occurrence XML node. Represents the context table occurrence of the lookup.
name="Table"	Valid table occurrence name	—

Tag Name	Value	Description
id="2">	Internal unique positive integer value indicating creation order	—
<FieldCatalog><Field><AutoEnter><Lookup><Field	—	XML node for a field.
name="Field2"	Valid field name	—
id = "2"	Internal unique positive integer value indicating creation order	—
table="Table1"	Table occurrence name	—
repetition="2" >	If repetition is "1", then it is implicit, no need to output it.	—
<FieldCatalog><Field><AutoEnter><Lookup> <NoMatchCopyOption	—	Lookup option.
value="DoNotCopy" >	Can have one of the following values: <ul style="list-style-type: none"> ■ DoNotCopy ■ CopyNextLower ■ CopyNextHigher ■ CopyConstant 	—
<FieldCatalog><Field><AutoEnter><Lookup> <CopyConstantValue>	Any valid text string	Lookup data information.
<FieldCatalog><Field><AutoEnter><Lookup> <CopyEmptyContent	—	Lookup copy empty content option.
value="True" >	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<FieldCatalog><Field><Validation	—	—
type = "Always"	Can have one of the following values: <ul style="list-style-type: none"> ■ Always ■ OnlyDuringDataEntry 	—
alwaysValidateCalculation = "True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Always validate calculation.
calculation="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the validation calculation is applicable.
valuelist="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the validation value list is applicable.

Tag Name	Value	Description
maxLength="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates if the validation maximum of character option is applicable.
message="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates if the validation error message option is applicable.
<FieldCatalog><Field><Validation><StrictDataType value="Numeric">	Can have one of the following values: <ul style="list-style-type: none"> Numeric FourDigitYear TimeOfDay 	—
<FieldCatalog><Field><Validation><NotEmpty value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
<FieldCatalog><Field><Validation><Unique value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
<FieldCatalog><Field><Validation><Existing value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
<FieldCatalog><Field><Validation><ValueList	—	—
name="ValueList1"	—	—
id="23" >	—	—
<FieldCatalog><Field><Validation><Range	—	—
from="1"	—	—
to="2" >	—	—
<FieldCatalog><Field><Validation><Calculation><![CDATA[Calc String]]>	—	—
<FieldCatalog><Field><Validation><DisplayCalculation>	—	—
<FieldCatalog><Field><Validation><DisplayCalculation><Chunk type="CustomFunctionRef">Custom Function Name</Chunk>	Can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	—
<FieldCatalog><Field><Validation><MaxDataLength value="1">	—	—
<FieldCatalog><Field><Validation><StrictValidation value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—

Tag Name	Value	Description
<FieldCatalog><Field><Validation><ErrorMessage>	—	—
<FieldCatalog><Field><Storage	—	—
maxRepetition="2"	—	—
global="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
storeCalculationResults="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Attribute applies only to field calculation types.
index="None"	Can have one of the following values: <ul style="list-style-type: none"> None Minimal All 	—
autoIndex="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
indexLanguage="Dutch" >	indexLanguage can be one of the languages listed in the Options for Field dialog box (Storage tab).	—
<FieldCatalog><Field><Storage><Remote	—	—
type="Open"	Can have one of the following values: <ul style="list-style-type: none"> Open Secure 	—
relativeTo="0"	—	Base directory ID.
<FieldCatalog><Field><Storage><Remote><Location	—	—
<Calculation table="DDR"> <![CDATA["DDR/c1/"]]></Calculation> <DisplayCalculation> <Chunk type="NoRef"> "DDR/c1/"</Chunk> </DisplayCalculation>	—	Calculation describing open storage relative path.
<FieldCatalog><Field><Furigana	—	<Furigana> exists when "Use Furigana Field" checkbox is checked in the UI.
inputMode="AsEntered" >	Can have one of the following values: <ul style="list-style-type: none"> AsEntered Hiragana 2ByteKatakana 2ByteRoman 1ByteKatakana 1ByteRoman 	—

Tag Name	Value	Description
<FieldCatalog><Field><Furigana><Field	—	—
name="field"	—	—
id="2"	—	—
baseTable="Table1"	—	—
shadowType="Supplemental">	Can have one of the following values: <ul style="list-style-type: none"> Shadow Supplemental 	Specifies the shadow field type. Only available if the parent BaseTable's "shadow" attribute is "True".

Base Directory Section

All nodes below start with <FMPReport><File><BaseDirectoryCatalog>

Tag Name	Value	Description
<Options>	—	—
<Options><Thumbnails	—	—
state = "true"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Thumbnails are enabled/disabled.
type = "Permanent">	Can have one of the following values: <ul style="list-style-type: none"> Permanent Temporary 	—
<BaseDirectoryList><BaseDirectory	—	—
id="0"	—	—

Relationship Section

All nodes below start with <FMPReport><File><RelationshipGraph>

Tag Name	Value	Description
<RelationshipList>	—	—
<RelationshipList><Relationship	—	—
id = "1">	—	—
<RelationshipList><Relationship><LeftTable	—	—
name="Table1"	—	—
cascadeDelete="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—

Tag Name	Value	Description
<code>cascadeCreate="True" ></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<code><RelationshipList><Relationship><LeftTable><SortList value="True"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Specify if the sort information is applicable or not.
<code><RelationshipList><Relationship><LeftTable><SortList <Sort type="Descending"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ Ascending ■ Descending ■ Custom 	—
<code><RelationshipList><Relationship><LeftTable><SortList <Sort><PrimaryField></code>	Child node is a field element	—
<code><RelationshipList><Relationship><LeftTable><SortList <Sort><SummaryField></code>	Child node is a field element; Optional	—
<code><RelationshipList><Relationship><LeftTable><SortList <Sort><OverrideLanguage language="Japanese"/></code>	Optional	—
<code><RelationshipList><Relationship><LeftTable><SortList <Sort><ValueList name="New Value List" id="23"/></code>	Optional	—
<code><RelationshipList><Relationship><RightTable</code>	—	—
<code>name="Table2"</code>	—	—
<code>cascadeDelete="True"</code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<code>cascadeCreate="True" ></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<code><RelationshipList><Relationship><RightTable><SortList value="True"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<code><RelationshipList><Relationship><RightTable><SortList <Sort type="Descending"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ Ascending ■ Descending ■ Custom 	—
<code><RelationshipList><Relationship><RightTable><SortList <Sort><PrimaryField></code>	Child node is a field element	—
<code><RelationshipList><Relationship><RightTable><SortList <Sort><SummaryField></code>	Child node is a field element	—
<code><RelationshipList><Relationship><RightTable><SortList <Sort><OverrideLanguage language="Japanese"/></code>	—	—

Tag Name	Value	Description
<RelationshipList><Relationship><RightTable><SortList><Sort><ValueList name="New Value List" id="23"/>	—	—
<RelationshipList><Relationship><JoinPredicateList>	—	—
<RelationshipList><Relationship><JoinPredicateCatalog><JoinPredicate type="LessThan" >	Can have one of the following values: <ul style="list-style-type: none"> ■ Equal ■ NotEqual ■ LessThan ■ LessThanOrEqualTo ■ GreaterThan ■ GreaterThanOrEqualTo ■ CartesianProduct 	—
<RelationshipList><Relationship><JoinPredicateCatalog><JoinPredicate><LeftField>	—	—
<RelationshipList><Relationship><JoinPredicateCatalog><JoinPredicate><LeftField><Field	—	—
table="Table1"	—	—
id="2"	—	—
name="Field1">	—	—
<RelationshipList><Relationship><JoinPredicateCatalog><JoinPredicate><RightField>	—	—
<RelationshipList><Relationship><JoinPredicateCatalog><JoinPredicate><RightField><Field	—	—
table="Table2"	—	—
id="2"	—	—
name="Field2">	—	—
<TableList>	—	—
<TableList><Table	—	—
name="T"	—	—
color = "#ffffff"	—	—
id="1"	—	—
baseTable = "TName"	—	—
baseTableId = "32345">	—	—
<TableList><Table><FileReference	—	—
name="file reference name"	—	—
id="1" >	—	—

Value List Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<ValueListCatalog>	—	—
<ValueListCatalog><ValueList	—	—
name="ValueList1"	Any value	—
id="1">	—	—
<ValueListCatalog><ValueList><Source value="Custom">	Can have one of the following values: <ul style="list-style-type: none"> ■ Custom ■ Field ■ External 	<CustomValues/PrimaryField/External> node will only exist if <Source value> is "Custom"/"Field"/"External". <SecondaryField> node will only exist if "also display" checked in the UI.
<ValueListCatalog><ValueList><CustomValues>	—	—
<ValueListCatalog><ValueList><CustomValues><Text>	—	—
<ValueListCatalog><ValueList><PrimaryField	—	—
sort = "True" show = "True" resortLanguage = "Finnish">	sort can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False show can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	The sort attribute indicates that the field contents are sorted. The show attribute indicates that the field contents are included in the value list. The resortLanguage indicates the language re-sort is based on.
<ValueListCatalog><ValueList><PrimaryField><Field	—	—
table="Table1"	—	—
id="2"	—	—
name="Field1"	—	—
shadowType="Shadow">	—	—
<ValueListCatalog><ValueList><SecondaryField	—	—
sort = "False" show = "False" resortLanguage = "Finnish"	sort can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False show can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	The sort attribute indicates that the field contents are sorted. The show attribute indicates that the field contents are included in the value list. The resortLanguage indicates the language re-sort is based on.
<ValueListCatalog><ValueList><SecondaryField><Field	—	—
table="Table2"	—	—
id="2"	—	—
name="Field2"	—	—
shadowType="Shadow">	—	—

Tag Name	Value	Description
<ValueListCatalog><ValueList><ShowRelated value="True">	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<ValueListCatalog><ValueList><ShowRelated><Table name="Table" id="1"/>	—	—
<ValueListCatalog><ValueList><External>	—	—
<ValueListCatalog><ValueList><External><FileReference	—	—
name="FileReferenceName"	—	—
id="123" >	—	—
<ValueListCatalog><ValueList><External><ValueList	—	—
name="ValueList1"	—	—
id="24">	—	—

Layout Section

All nodes below start with <FMPPReport><File>

Tag Name	Value	Description
<LayoutCatalog>	—	—
<LayoutCatalog><Group	—	A collection of layouts and/or other groups.
name="some_group"	—	—
id="1"	—	—
groupCollapsed="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates whether or not this group is collapsed in the UI.
includeInMenu="True">	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<LayoutCatalog></Group>	—	—
<LayoutCatalog><Layout	—	—
name="layout#1"	—	—
id="234"	—	—
quickFind="True"	—	—
includeInMenu="True" >	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Property to determine if the layout is included in the menu.
<LayoutCatalog><Layout><Table	—	—

Tag Name	Value	Description
name="table"	—	—
id="1">	—	—
<LayoutCatalog><Layout><CustomMenuSet	—	—
name="Custom menu set"	—	—
id="1">	—	—
<LayoutCatalog><Layout><Options saveRecord="True" showFieldFrames="True" showRecordIndicator="True" >	—	—
<LayoutCatalog><Layout><Object	—	—
name="FieldObj1"	A valid layout object name string	—
flags = "123"	—	<p>Bit flag value to indicate the following settings:</p> <ul style="list-style-type: none"> ■ 0x00000001 - Object has conditional formatting ■ 0x00000002 - Locked on layout ■ 0x00000004 - Object has hide condition ■ 0x00000010 - Marked for sliding up ■ 0x00000020 - Marked for sliding left ■ 0x00000100 - Evaluate hide condition in Find Mode ■ 0x00000200 - Don't image when printing ■ 0x00004000 - Object has associated tooltip ■ 0x00010000 - Show "hand over button" cursor ■ 0x10000000 - Don't anchor left ■ 0x20000000 - Don't anchor top ■ 0x40000000 - Anchor right ■ 0x80000000 - Anchor bottom
type="Field">	<p>Can have one of the following values:</p> <ul style="list-style-type: none"> ■ Field ■ GroupButton ■ Line ■ Rect ■ RRect ■ Oval ■ Text ■ Portal ■ ExternalObject ■ TabControl ■ TabPanel ■ SlideControl ■ SlidePanel ■ ButtonObj ■ PopoverButton ■ Popover 	—

Tag Name	Value	Description
<LayoutCatalog><Layout><Object> <ConditionalFormatting>	—	—
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item	—	—
id="0"	—	—
flags="9">	—	<ul style="list-style-type: none"> ■ 0x0001 - Condition enabled. ■ 0x0002 - Apply specified font color if condition is true. ■ 0x0004 - Apply specified fill color if condition is true. ■ 0x0008 - Apply specified font face if condition is true. ■ 0x0010 - Apply specified font size if condition is true.
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item><Condition	—	—
op="1">	—	Identifier of a string in the localized string table, which describes a preset operation (e.g. "Less than or equal to")
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item><Condition><Calc>...	—	Condition calculation. Done the same way as in the rest of the grammar.
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item><Condition><RangeBegin>	Any valid string	Beginning of range used in preset function. Defaults to blank.
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item><Condition><RangeEnd>	Any valid string	End of range used in preset function. Defaults to blank.
<LayoutCatalog><Layout><Object> <ConditionalFormatting><Item><Format>...	—	Font tag + subtags, the same ones we use currently (for example, when specifying a font for a field).
<LayoutCatalog><Layout><Object><HideCondition> <Calculation> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	—
<LayoutCatalog><Layout><Object><ToolTip> <Calculation> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	—
<LayoutCatalog><Layout><Object><FieldObj	—	—
numOfReps="-3"	—	Negative is used to denote horizontal display. Positive is used for vertical display. The absolute value shown is for the number of repetitions including the starting repetition.

Tag Name	Value	Description
flags="2080"	Integer value containing bit flag information	<p>Possible bit flag values are:</p> <ul style="list-style-type: none"> ■ Add "Other" item to control set fields = 0x0001 ■ Automatically select all when entering field = 0x0002 ■ Do not allow entry into field in Browse mode = 0x0004 ■ Add "Edit" item to edit value list = 0x0008 ■ Do not allow entry into field in Find mode = 0x0010 ■ Exit field on TAB key = 0x0020 ■ Exit field on RETURN key = 0x0040 ■ Exit field on ENTER key = 0x0080 ■ Include vertical scroll bar = 0x0100 ■ Include horizontal scroll bar = 0x0200 ■ Include drop-down/pop-up icon = 0x0400 ■ Auto-complete using specified value list or field's values = 0x0800 ■ Disable visual spell checking = 0x2000 ■ Disable for quick find = 0x8000
inputMode="0"	Values can be: 128 - 135	<p>Meaning of the numbers:</p> <p>128 : Sync Field Font 129 : Japanese Active 130 : Japanese Direct 131 : Hiragana 132 : Full-Width Katakana 133 : Full-Width Alpha 134 : Half-Width Katakana 135 : Half-Width Alpha</p>
keyboardType="0"	Values can be: 0 - 8	<p>Meaning of the numbers:</p> <p>0 : System Default 1 : Default for Data Type 2 : ASCII 3 : URL 4 : Email 5 : Numeric 10-Key 6 : Number Keypad 7 : Number and Punctuation 8 : Phone</p>
displayType="0"	Values can be: 0 to 6	<p>Meaning of the numbers:</p> <p>0 : Edit Box 1 : Drop-down List 2 : Pop-up Menu 3 : Checkbox Set 4 : Radio Button Set 6 : Calendar popup</p>
tableViewVisibility="0"	Values can be 0-2	<p>Meaning of the numbers:</p> <p>0 : On both layout and table view 1 : Not visible in table view 2 : Only visible in table view</p>
webContainer="1"	Values can be 0 or 1	<p>Meaning of the numbers:</p> <p>0: Web Container is Off 1: Web Container is On</p>

Tag Name	Value	Description
autoPlay="1"	Values can be 0 or 1	Meaning of the numbers: 0: Autoplay is Off 1: Autoplay is On
quickFind="1">	Values can be 0 or 1	Meaning of the numbers: 0: Quick Find is Off 1: Quick Find is On
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo>	—	—
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo><Field	—	—
name="Field1"	—	—
id="2"	—	—
table="Table1"	—	—
repetition="2"	—	—
maxRepetition="5"	—	This is the field's storage repetition number, listed here again for external fields where it might not be possible to reference the field's definition.
<LayoutCatalog><Layout><Object><FieldObj><DDRInfo><ValueList	—	—
name="Cities" id="23">	—	—
<LayoutCatalog><Layout><Object><GroupButtonObj>	—	Can have other child Object nodes.
<LayoutCatalog><Layout><Object><GroupButtonObj><Step>	—	Step node and all its children can contain script steps as covered under the Script Section .
<LayoutCatalog><Layout><Object><TextObj>	—	—
<LayoutCatalog><Layout><Object><TextObj><FieldList	—	—
quickFind="True">	—	—
<LayoutCatalog><Layout><Object><TextObj><FieldList><Field name="field" id="2" table="table" repetition="2"/>	—	—
<LayoutCatalog><Layout><Object><PortalObj	—	—
portalFlags="1"	—	Possible flag values and their meanings are: <ul style="list-style-type: none"> ■ Show scroll bar on portal = 0x0001 ■ Allow deletion of rows = 0x0004 ■ Rows should be sorted (according to associated sort spec) = 0x0008 ■ Retain scroll bar position after active exit = 0x0010 ■ Increase row height when autosizing vertically rather than increasing number of rows= 0x0020 ■ Right-to-left layout of portal elements = 0x0040 ■ Rows should be filtered (according to associated filter calc expr)= 0x0080
numOfRows="2"	—	Number of rows shown on the portal.

Tag Name	Value	Description
initialRow="1">	—	Initial row number.
<LayoutCatalog><Layout><Object><PortalObj> <TableAliasKey>	—	Name of table occurrence of the portal object.
<LayoutCatalog><Layout><Object><PortalObj><FieldList>	—	—
<LayoutCatalog><Layout><Object><PortalObj><FieldList> <Field	—	—
name="Table"	—	—
id="2"	—	—
table="Table1">	—	—
<LayoutCatalog><Layout><Object><PortalObj> <SortList value="True"> <Sort type="Descending"> <PrimaryField> <Field name="f1" id="2" table="test123"/> </PrimaryField> </Sort> <Sort type="Ascending"> <PrimaryField> <Field name="f4" id="2" table="test123"/> </PrimaryField> <SummaryField> <Field name="summary" id="2" table="test123"/> </SummaryField> <OverrideLanguage language="Japanese"/> </Sort> <Sort type="Custom"> <PrimaryField> <Field name="f5" id="2" table="test123"/> </PrimaryField> <ValueList name="New Value List" id="2"/> </Sort> </SortList>	—	—
<LayoutCatalog><Layout><Object><PortalObj><FilterCalc> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	Portal filtering calculation.
<LayoutCatalog><Layout><Object><TabControlObj	—	—
tabStyle="1"	—	—
visPanelKey="5"	—	—
defaultVisPanelKey="6"	—	—
tabJustification="1"	—	—
visPanelIndex="1"	—	—
defaultVisPanelIndex="2"	—	—

Tag Name	Value	Description
tabWidthModifier="9"	An integer greater than or equal to zero	Specifies the tab width in pixels.
tabFlagSet="4">	—	—
<LayoutCatalog><Layout><Object><TabControlObj><Object><TextObj>...	—	The text object that represents the label of the tab. Either PanelCalc or TextObj tag will be output for a tab label.
<LayoutCatalog><Layout><Object><TabControlObj><PanelCalc> <Calculation> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	The calculation that will be used as the label of the tab. Either PanelCalc or TextObj tag will be output for a tab label.
<LayoutCatalog><Layout><Object><TabControlObj><Object><TabPanelObj	—	—
tabLeftEdge="100"	—	—
tabWidth="40"	—	—
tabPanelFlagSet="0">	—	—
<LayoutCatalog><Layout><Object><TabControlObj><Object><TabPanelObj><Object>...	—	Any child object inside the tab panel object.
<LayoutCatalog><Layout><Object><SlideControlObj	—	—
visPanelKey="5"	—	—
visPanelIndex="0"	—	—
dotSize="9"	Integer value	The size of the dots.
slideFlagSet="0">	—	—
<LayoutCatalog><Layout><Object><SlideControlObj><Object><SlidePanelObj	—	—
slidePanelFlagSet="0">	—	—
<LayoutCatalog><Layout><Object><SlideControlObj><Object><SlidePanelObj><Object>...	—	Any child object inside the slide panel object.
<LayoutCatalog><Layout><Object><PopoverButtonObj	—	—
popoverObjID="1">	ID of associated popover object	—
<LayoutCatalog><Layout><Object><PopoverObj	—	—
popoverButtonObjID="2">	ID of associated popover button object	—
<LayoutCatalog><Layout><Object><PopoverObject><TextObj>	—	The text that represents the title of the popover object.
<LayoutCatalog><Layout><Object><PopoverObject><Object>...	—	Any child object inside the popover object.

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExternalObj	—	—
typeID="WEBV"	A quadchar string, can have one of the following values: <ul style="list-style-type: none"> ■ webviewer = "WEBV" ■ chart = "CHRT" 	Identifies the layout object.
typeIndex="0"	—	Internal value that selects one of several available object types associated with typeID.
externalFlagSet="1">	—	Bit flags indicating the following properties: <ul style="list-style-type: none"> ■ Object can be activated = 0x0001 ■ Object can display content in Find mode = 0x0002 ■ Object shows the progress of an operation = 0x0004 ■ Object shows status messages = 0x0008 ■ The user explicitly chose a custom calc = 0x8000
<LayoutCatalog><Layout><Object><ExternalObj typeID = "WEBV"> <Calculation index="0"> <![CDATA[{{CalcString}}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation>	—	Web viewer calculation.
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title>	—	Title of the chart.
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title><CharacterStyle>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title><CharacterStyle><Font-family	—	—
codeSet="Roman"	—	—
fontId="1">	—	—
Arial</Font-family>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title><CharacterStyle><Font-size>	Integer value	—
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title><CharacterStyle><Face>	Integer value representing Font Face	—
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><Title><CharacterStyle><Color>	formatted as : #66CCCC	—

Tag Name	Value	Description
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Title><Text> <Calculation index="0"> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation></code>	Any valid string	Title value calculation.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><SeriesSource</code>	—	—
<code> source="Related Records"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ Current Found Set ■ Current Record (delimited data) ■ Related Records 	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><SeriesSource> <ShowRecordGroupDataWhenSorted></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Applicable when source is "Current Found Set".
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><SeriesSource><SourceTable></code>	Name of the table	Applicable when source is "Related Records".
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><SeriesSource> <SortList value="True"> <Sort type="Descending"> <PrimaryField> <Field name="f1" id="2" table="test123"/> </PrimaryField> </Sort> <Sort type="Ascending"> <PrimaryField> <Field name="f4" id="2" table="test123"/> </PrimaryField> <SummaryField> <Field name="summary" id="2" table="test123"/> </SummaryField> <OverrideLanguage language="Japanese"/> </Sort> <Sort type="Custom"> <PrimaryField> <Field name="f5" id="2" table="test123"/> </PrimaryField> <ValueList name="New Value List" id="2"/> </Sort> </SortList></code>	—	Applicable when source is "Related Records" and sort is enabled.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries></code>	—	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><XSeriesList></code>	—	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><XSeriesList><Series></code>	—	—

Tag Name	Value	Description
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><XSeriesList><Series><Value> <Calculation index="0"> <![CDATA[{CalcString}]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation></pre>	Any valid string	Series value calculation.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><XSeriesList><Series><Title></pre>	—	Same as <ExternalObj><Title>.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><XSeriesList><Series> <DataSymbol></pre>	—	An integer used to store visual symbol information about that series. For this node, it is not used at the moment, but is available for future use.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><YSeriesList></pre>	—	Same grammar as <ExternalObj><SeriesList><XSeriesList>. However, the DataSymbol node is used to store the symbol information for the scatter plot.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><WSeriesList></pre>	—	Same grammar as <ExternalObj><SeriesList><XSeriesList>.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartSeries><ZSeriesList></pre>	—	Same grammar as <ExternalObj><SeriesList><XSeriesList>.
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual></pre>	—	—
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Type></pre>	<p>Can have one of the following values:</p> <ul style="list-style-type: none"> ■ Bar ■ Column ■ Line ■ Area ■ Pie ■ Stacked Bar ■ Stacked Column ■ Positive Negative Column ■ Bubble ■ Scatter 	—
<pre><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Style></pre>	<p>Can have one of the following values:</p> <p>Applicable to bar, column, and area chart types:</p> <ul style="list-style-type: none"> ■ Solid ■ Shaded <p>Applicable to pie chart types:</p> <ul style="list-style-type: none"> ■ Opaque ■ Semi Transparent <p>Applicable to line chart types:</p> <ul style="list-style-type: none"> ■ Poly-line ■ Curve Fitting 	—

Tag Name	Value	Description
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Appearance></code>	Can have one of the following values: <ul style="list-style-type: none"> Flat 3D 	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Scheme></code>	Can have one of the following values: <ul style="list-style-type: none"> FileMaker Colors Saturated Primary Basics Earth Jewel Tone Pastels Spring Desert 	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background></code>	—	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background><Style></code>	Can have one of the following values: <ul style="list-style-type: none"> SolidFill Gradient Transparent 	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background><GradientType></code>	Can have one of the following values: <ul style="list-style-type: none"> Linear Radial 	Applicable when <code><Background><Style></code> is "Gradient".
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background><GradientProperty></code>	Can have one of the following values: Applicable to Linear Gradient: <ul style="list-style-type: none"> Upper-Left/Bottom-Right Bottom-Left/Upper-Right Up/Down Left/Right Applicable to Radial Gradient: <ul style="list-style-type: none"> Bottom-Left Bottom-Right Upper-Left Upper-Right 	Applicable when <code>/<Style></code> is "Gradient".
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background><ColorList></code>	—	When <code>/<Style></code> is: <ul style="list-style-type: none"> SolidFill: contains 1 element Gradient: contains 2 elements Transparent: contains 0 element
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><Background><ColorList><Color></code>	formatted as : #66CCCC	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Visual><ShowDataPoints pieShowPercent="False" pieShowActual="False" value="False"></code>	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates whether labels are printed next to the data points. Attributes <code>pieShowPercent</code> and <code>pieShowActual</code> are generated, but they are applicable only if the chart is a Pie type.

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension>	—	New node to store extension info relating to the visual appearance of the charts.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><MajorGridLines>	—	Contains major grid lines info if applicable to the chart type. This node might be generated even if the chart type doesn't need it.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><MajorGridLines><Color>	—	Color as RGB hex.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><MinorGridLines>	—	Contains minor grid lines info. if applicable to the chart type. This node might be generated even if the chart type doesn't need it.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><MinorGridLines><Color>	—	Color as RGB hex.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><SeriesColor>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><VisualExtension><SeriesColor><Color>	—	Color for single color mode. The rest of the color for the scheme are generated at runtime.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend	—	—
style="Normal">	Can have one of the following values: <ul style="list-style-type: none"> ■ None ■ Normal 	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><CharacterStyle>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><CharacterStyle><Font-family	—	—
codeSet="Roman"	—	—
fontId="1">	—	—
Arial</Font-family>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><CharacterStyle><Font-size>	Integer value	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Title><CharacterStyle><Face>	Integer value representing Font Face	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><CharacterStyle><Color>	formatted as : #66CCCC	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><Border>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><Border><Style>	Can have one of the following values: <ul style="list-style-type: none"> ■ No Border ■ Rectangular Border ■ Rounded Border 	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><Border><Color>	formatted as : #66CCCC	Applicable when /<Style> is NOT "No Border".

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Legend><Background>	—	Same as <ExternalObj><Visual><Background>.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Title>	—	Same as <ExternalObj><Title>.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label><CharacterStyle>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label><CharacterStyle><Font-family>	—	—
codeSet="Roman"	—	—
fontId="1">	—	—
Arial</Font-family>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label><CharacterStyle><Font-size>	Integer value	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><Title><CharacterStyle><Face>	Integer value representing Font Face	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label><CharacterStyle><Color>	formatted as : #66CCCC	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><Label><Angle>	Integer value	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><ConstrainAxis	—	Constrain the minimum and maximum value shown on the axis.
enable="True">	—	"True" if constrain is applied.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><Axis><ConstrainAxis><Min>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><Axis><ConstrainAxis><Max>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension>	—	Extensions to the X axis.

Tag Name	Value	Description
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension><MinCalc></code>	—	Calc for minimum value.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension><MaxCalc></code>	—	Calc for max value.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension><MajorTickIncrement value="?" show="False"/></code>	—	Major tick info.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension><MinorTickIncrement value="?" show="False"/></code>	—	Minor tick info.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisExtension><Scale value="Linear"/></code>	—	Values can be: <ul style="list-style-type: none"> ■ Linear ■ Log
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat></code>	—	Formatting info.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat><FormatType value="NoFormat"></code>	Can have one of the following values: <ul style="list-style-type: none"> ■ NoFormat (as entered) ■ NumericFormat ■ DateFormat ■ TimeFormat 	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat><FormatType><NumFormat falseString="" trueString="" decimalDigits="9999" negativeColor="0" decimalPoint="46" thousandsSep="44" currencySymbol="" negativeStyle="0" charStyle="0" flags="1"/></code>	—	Internal information for the number format.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat><FormatType><DateFormat separator="47" dayStyle="0" monthStyle="0" charStyle="0" format="0"></code>	—	Internal information for the date format.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat><FormatType><DateFormat><DateElement></code>	—	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XChartAxis><XAxisFormat><FormatType><TimeFormat ampmString="" pmString="" amString="" separator="58" minsecStyle="0" hourStyle="0" charStyle="0" flags="8"/></code>	—	Internal information for the time format.
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><YChartAxis></code>	—	Same as <code><ExternalObj><ChartAxis><XChartAxis></code> .
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><DataLabelFormat></code>	—	—
<code><LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><ConstrainAxis><Min></code>	—	—

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><Axis><ConstrainAxis><Max>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension>	—	Extensions to the X axis.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension><MinCalc value="False">	Value attribute indicates if the calculation is applied or not.	Calc for minimum value.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension><MaxCalc value"False">	Value attribute indicates if the calculation is applied or not.	Calc for max value.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension><MajorTickIncrement value="?" show="False"/>	—	Major tick info.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension><MinorTickIncrement value="?" show="False"/>	—	Minor tick info.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisExtension><Scale value="Linear"/>	—	Values can be: <ul style="list-style-type: none"> Linear Log
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat>	—	Formatting info.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType value="NoFormat">	Can have one of the following values: <ul style="list-style-type: none"> NoFormat (as entered) NumericFormat DateFormat TimeFormat 	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType><NumFormat falseString="" trueString="" decimalDigits="9999" negativeColor="0" decimalPoint="46" thousandsSep="44" currencySymbol="" negativeStyle="0" charStyle="0" flags="1"/>	—	Internal information for the number format.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType><DateFormat separator="47" dayStyle="0" monthStyle="0" charStyle="0" format="0">	—	Internal information for the date format.
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType><DateFormat><DateElement>	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType><DateFormat><DateElementSep index="0">	—	—
<LayoutCatalog><Layout><Object><ExternalObj typeId = "CHRT"><ChartAxis><XAxisList><XAxisFormat><FormatType><TimeFormat ampmString="" pmString="" amString="" separator="58" minsecStyle="0" hourStyle="0" charStyle="0" flags="8"/>	—	Internal information for the time format.

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExternalObj typeID = "CHRT"><ChartAxis><YAxisList>	—	Same as <ExternalObj><ChartAxis><XAxisList>.
<LayoutCatalog><Layout><Object><ExtendedAttributes	—	—
fontHeight="12"	—	—
graphicFormat="1"	—	Bit flags indicating the following properties: <ul style="list-style-type: none"> ■ Shrink to fit = 0x0001 ■ Grow to fit = 0x0002 ■ Maintain proportions = 0x0004 ■ Left align = 0x0008 ■ Top align = 0x0010 ■ Right align = 0x0020 ■ Bottom align = 0x0080 ■ Colorize = 0x0040
<LayoutCatalog><Layout><Object><ExtendedAttributes><NumFormat	—	—
flags="1"	—	Bit flags indicating the following properties: <ul style="list-style-type: none"> ■ No formatting = 0x0001 ■ Use separator = 0x0002 ■ Use notation (% or \$) = 0x0004 ■ Use fix number of decimal digits= 0x0008 ■ Use percent notation = 0x0010 ■ Display as boolean = 0x0020 ■ Use Kanji Man-Oku style = 0x0040 ■ Use Kanji 10,100,1000,10000 style = 0x0080 ■ Use general format = 0x0100 ■ Notation outside negative format = 0x0400 ■ Leading currency symbol = 0x0800 ■ Use given negative color = 0x1000 ■ Blank if zero = 0x2000
charStyle="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Single byte ■ 1 - Double byte ■ 2 - Simplified Kanji digits ■ 3 - Traditional Kanji digits ■ 4 - Simplified Kanji with separator 	—
negativeStyle="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Leading minus ■ 1 - Trailing minus ■ 2 - Parenthesis ■ 3 - Angle ■ 4 - Credit ■ 5 - Triangle 	Display style for negative values.
currencySymbol="\$"	—	—
thousandsSep=","	—	—
decimalPoint="."	—	—

Tag Name	Value	Description
negativeColor="#FF0000"	—	—
decimalDigits="2"	—	Number of decimals to display.
trueString="True"	—	Representation for true value.
falseString="False">	—	Representation for false value.
<LayoutCatalog><Layout><Object><ExtendedAttributes> <DateFormat	—	—
format="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - As entered ■ 1 - Custom ■ 2 - Numeric date ■ 3 - Short date ■ 4 - Full date ■ 5 - Short date /w day name ■ 6 - Full date /w day name ■ 7 - Long numeric date 	Display format.
charStyle="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Single byte ■ 1 - Double byte ■ 2 - Simplified Kanji digits ■ 3 - Traditional Kanji digits ■ 4 - Simplified Kanji with separator 	—
monthStyle="0"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - None ■ 1 - Zero ■ 2 - Space 	Specifies leading character, if any.
dayStyle="0"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - None ■ 1 - Zero ■ 2 - Space 	Specifies leading character, if any.
separator="/">	—	—

Tag Name	Value	Description
<LayoutCatalog><Layout><Object><ExtendedAttributes> <DateFormat><DateElement>	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Empty ■ 1 - Day ■ 2 - Short day name ■ 3 - Full day name ■ 4 - Month ■ 5 - Short month ■ 6 - Full month ■ 7 - Short year ■ 8 - Full year ■ 9 - Short quarter ■ 10 - Full quarter ■ 11 - Asian quarter ■ 12 - Half year ■ 13 - Reign year ■ 14 - Short reign year ■ 15 - Alphabetic reign year ■ 16 - Asian day name ■ 17 - Short Asian day name 	—
<LayoutCatalog><Layout><Object><ExtendedAttributes> <DateFormat><DateElementSep	—	Date element separator.
index="1">	—	—
<LayoutCatalog><Layout><Object><ExtendedAttributes> <TimeFormat	—	—
flags="1"	—	Bit flags indicating the following properties: <ul style="list-style-type: none"> ■ Hour = 0x0001 ■ Minutes = 0x0002 ■ Seconds = 0x0004 ■ As entered (leave unformatted) = 0x0008 ■ Use 24h time = 0x0010 ■ Prefix 24h time (instead of suffix) = 0x0020 ■ Prefix 12h time (instead of suffix)= 0x0040 ■ Use separator (otherwise uses Japanese style) = 0x0080
charStyle="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Single byte ■ 1 - Double byte ■ 2 - Simplified Kanji digits ■ 3 - Traditional Kanji digits ■ 4 - Simplified Kanji with separator 	—
hourStyle="1"	Can have the following values: <ul style="list-style-type: none"> ■ 0 - None ■ 1 - Zero ■ 2 - Space 	—

Tag Name	Value	Description
<code>minsecStyle="1"</code>	Can have the following values: <ul style="list-style-type: none"> ■ 0 - None ■ 1 - Zero ■ 2 - Space 	—
<code>separator=":"</code>	—	—
<code>amString="am"</code>	—	—
<code>pmString="pm"</code>	—	—
<code>ampmString="am/pm"></code>	—	—
<code><LayoutCatalog><Layout><Object><Styles><LocalCSS></code>	—	Local styles for the object in CSS format. Please refer to the CSS styles reference.
<code><LayoutCatalog><Layout><Object><Styles><CustomStyles></code>	—	Lists all of the CustomStyles associated with this LayoutObject.
<code><LayoutCatalog><Layout><Object><CharacterStyleVector><CharacterStyle</code>	—	—
<code>mask="1"></code>	—	Internal use only.
<code><LayoutCatalog><Layout><Object><CharacterStyleVector><CharacterStyle><Font-family</code>	—	—
<code>codeSet="Roman"</code>	—	—
<code>fontId="1"></code>	—	—
<code>Arial</Font-family></code>	—	—
<code><LayoutCatalog><Layout><Object><CharacterStyleVector><CharacterStyle><Font-size></code>	—	—
<code><LayoutCatalog><Layout><Object><CharacterStyleVector><CharacterStyle><Face></code>	—	—
<code><LayoutCatalog><Layout><Object><CharacterStyleVector><CharacterStyle><Color></code>	—	—
<code><LayoutCatalog><Layout><Object><ParagraphStyleVector><ParagraphStyle></code>	—	—
<code>mask="128"</code>	—	—
<code><LayoutCatalog><Layout><Object><ParagraphStyleVector><ParagraphStyle><Justification></code>	Can have the following values: <ul style="list-style-type: none"> ■ 2 - Center ■ 3 - Right ■ 4 - Full ■ Otherwise Left 	Specify the justification of the tab control object.
<code><LayoutCatalog><Layout><Object><ParagraphStyleVector><ParagraphStyle><LeftMargin></code>	—	In points (1/72th of an inch).
<code><LayoutCatalog><Layout><Object><ParagraphStyleVector><ParagraphStyle><RightMargin></code>	—	In points (1/72th of an inch).
<code><LayoutCatalog><Layout><Object><ParagraphStyleVector><ParagraphStyle><Indent></code>	—	In points (1/72th of an inch).

Tag Name	Value	Description
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><SpaceLeading	—	In units as specified below.
units="1">	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Lines ■ 1 - Points ■ 2 - Centimeters ■ 3 - Inches 	—
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><SpaceBefore	—	In units as specified below.
units="1">	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Lines ■ 1 - Points ■ 2 - Centimeters ■ 3 - Inches 	—
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><SpaceAfter	—	In units as specified below.
units="1">	Can have the following values: <ul style="list-style-type: none"> ■ 0 - Lines ■ 1 - Points ■ 2 - Centimeters ■ 3 - Inches 	—
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><Tab>	—	—
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><Tab> <Position>	—	—
<LayoutCatalog><Layout><Object> <ParagraphStyleVector><ParagraphStyle><Tab><Type>	Can have the following values: <ul style="list-style-type: none"> ■ 1 - Left ■ 2 - Center ■ 3 - Right ■ 4 - Decimal 	—

Tag Name	Value	Description
<ScriptTriggers>	—	—
<ScriptTriggers><Trigger	—	—
event="OnObjectEnter"	<p>Can have one of the following values:</p> <ul style="list-style-type: none"> ■ OnObjectEnter ■ OnObjectExit ■ OnObjectModify ■ OnObjectValidate ■ OnPanelSwitch ■ OnObjectSave ■ OnObjectKeystroke ■ OnLayoutEnter ■ OnLayoutExit ■ OnViewChange ■ OnLayoutKeystroke ■ OnRecordLoad ■ OnRecordCommit ■ OnRecordRevert ■ OnModeEnter ■ OnModeExit ■ OnLayoutSizeChange ■ OnGestureTap 	Tells what type of trigger this is.
id="1"	<p>id can have one of the following values:</p> <ul style="list-style-type: none"> ■ 1 - OnObjectEnter ■ 2 - OnObjectExit ■ 3 - OnObjectModify ■ 4 - OnObjectSave ■ 5 - OnObjectKeystroke ■ 6 - OnObjectValidate ■ 7 - OnPanelSwitch ■ 101 - OnLayoutEnter ■ 102 - OnLayoutKeystroke ■ 103 - OnRecordLoad ■ 104 - OnRecordCommit ■ 105 - OnRecordRevert ■ 106 - OnModeEnter ■ 107 - OnModeExit ■ 109 - OnLayoutExit ■ 110 - OnViewChange ■ 111 - OnLayoutSizeChange ■ 112 - OnGestureTap ■ 201 - OnFirstWindowOpen ■ 202 - OnLastWindowClose ■ 203 - OnWindowTimer 	The id is the internal number used to tell the type of the trigger.

Tag Name	Value	Description
triggerFlags="1">	Value of the bits in the number have the following values: <ul style="list-style-type: none"> 0x0001 = Trigger is enabled in browse mode 0x0002 = Trigger is enabled in find mode 0x0004 = Trigger is enabled in preview mode 	Various bit-flag properties.
<ScriptTriggers><Trigger><Script	—	This node gives detailed information about the script to be invoked and the parameter to be passed to the script.
id="1"	—	ScriptKey of the script to be invoked.
name="BeepScript"	—	Name of the script to be invoked.
fromFile="FileWithScript"	—	The name of the file containing the script to be invoked. Present only if the script is from another file.
Parameter="A parameter">	—	Optional. The XML-quoted representation of the calc formula to be used to compute the parameter to be passed to the invoked script.
<FileReference id="1" name="FileWithScript"> <UniversalPathList> file:FileWithScript.fmp12 </UniversalPathList> </FileReference>	—	Present if the script to be invoked is from an external file.
<Calculation> <![CDATA["A param for the script"]]> </Calculation> <DisplayCalculation> <Chunk type="NoRef"> "A param for the script" </Chunk> </DisplayCalculation>	—	Present if there is a calc specified to generate the parameter to the script.
<ScriptTriggers><Trigger><TriggerText>	Contains a textual representation of the trigger	The other nodes are useful if you want to work with the pieces that make up the trigger; this node is useful as a textual summary of the entire trigger.

Account Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<AccountCatalog>	—	—
<AccountCatalog><Account	—	—
name="Sales"	—	—
id="1"	—	—

Tag Name	Value	Description
status="Active"	Can have one of the following values: <ul style="list-style-type: none"> Active Inactive 	—
changePasswordOnNextLogin="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
managedBy = "FileMaker"	Can have one of the following values: <ul style="list-style-type: none"> FileMaker External 	—
emptyPassword="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates if the account uses an empty password.
privilegeSet ="Set1" >	—	Indicates the privilege set assigned to this account.
<AccountCatalog><Account><Description>	—	—

Privilege Set Section

All nodes below start with <FMPReport><File><PrivilegeCatalog>

Tag Name	Value	Description
<PrivilegeSet	—	—
name="GuestUsers"	—	—
id="1"	—	—
printing="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
exporting="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
managedExtended="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
overrideValidationWarning="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—

Tag Name	Value	Description
idleDisconnect="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
menu="All"	Can have one of the following values: <ul style="list-style-type: none"> All EditOnly Minimal 	—
allowModifyPassword="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
passwordExpiry="90"	—	Number of days before the password expires.
passwordMinLength="8"	—	—
comment="Some description text">	—	—
<PrivilegeSet><Records	—	—
value="ViewOnly"	Can have one of the following values: <ul style="list-style-type: none"> ViewOnly CreateEdit CreateEditDelete NoAccess Custom 	—
<PrivilegeSet><Records><TableList>	—	TableList node will only exist, if <Records value> is "Custom".
<PrivilegeSet><Records><TableList><BaseTable	—	—
name="addressbook"	—	If name attribute is "[Any New Table]", then this node will refer to all newly created tables.
shadow="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates whether or not this table is a shadow table.
id="123" >	—	—
<PrivilegeSet><Records><TableList><BaseTable><DataSourceRef	—	A reference to the data source associated with this table. Only available if the "shadow" attribute of the parent BaseTable is "True".
name="..."	Any valid string	The name of the data source (data source names are unique.)
catalogName="catalog"	Any valid string	The name of the remote table's catalog in the ODBC data source.
schemaName="schema"	Any valid string	The name of the remote table's schema in the ODBC data source.
tableName="table">	Any valid string	The name of the remote table's table name in the ODBC data source.

Tag Name	Value	Description
<PrivilegeSet><Records><TableList><Table><View value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False Limited 	—
<PrivilegeSet><Records><TableList><Table><View><Calculation><![CDATA[Calc String]]>	—	This node will only exist if <View value> is "Limited".
<PrivilegeSet><Records><TableList><Table><View><DisplayCalculation>	—	This node will only exist if <View value> is "Limited".
<PrivilegeSet><Records><TableList><Table><View><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	—
<PrivilegeSet><Records><TableList><Table><Edit value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False Limited 	—
<PrivilegeSet><Records><TableList><Table><Edit><Calculation><![CDATA[Calc String]]>	—	This node will only exist if <Edit value> is "Limited".
<PrivilegeSet><Records><TableList><Table><Edit><DisplayCalculation>	—	This node will only exist if <Edit value> is "Limited".
<PrivilegeSet><Records><TableList><Table><Edit><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	Can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	—
<PrivilegeSet><Records><TableList><Table><Create value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
<PrivilegeSet><Records><TableList><Table><Delete value="True">	Can have one of the following values: <ul style="list-style-type: none"> True False Limited 	—
<PrivilegeSet><Records><TableList><Table><Delete><Calculation>	—	This node will only exist if <Delete value> is "Limited".
<PrivilegeSet><Records><TableList><Table><Delete><DisplayCalculation>	—	This node will only exist if <Delete value> is "Limited".
<PrivilegeSet><Records><TableList><Table><Delete><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	Can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	—

Tag Name	Value	Description
<PrivilegeSet><Records><TableList><Table><FieldAccess	—	—
value="Limited">	Can have one of the following values: <ul style="list-style-type: none"> ■ All ■ Limited ■ No Access 	—
<PrivilegeSet><Records><TableList><Table><FieldAccess><FieldList>	—	This node will only exist if <FieldAccess value> is "Limited".
<PrivilegeSet><Records><TableList><Table><FieldAccess><FieldList><Field	—	—
name="f2" id = "2"	—	—
accessRestriction="Modifiable" >	Can have one of the following values: <ul style="list-style-type: none"> ■ Modifiable ■ ViewOnly ■ NoAccess 	—
<PrivilegeSet><Layouts	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
value="Custom" >	Can have one of the following values: <ul style="list-style-type: none"> ■ Modifiable ■ ViewOnly ■ Custom 	LayoutList node will only exist, if <Layouts value> is "Custom".
<PrivilegeSet><Layouts><LayoutList>	—	—
<PrivilegeSet><Layouts><LayoutList><Layout	—	—
name="MainLayout"	—	If name attribute is "[Any New Layout]", then this node will refer to all newly created Layouts.
id="221">	—	—
<PrivilegeSet><Layouts><LayoutList><Layout><LayoutAccess	—	—
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> ■ Modifiable ■ ViewOnly ■ NoAccess 	—
<PrivilegeSet><Layouts><LayoutList><Layout><DataAccess	—	—
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> ■ Modifiable ■ ViewOnly ■ NoAccess 	—

Tag Name	Value	Description
<PrivilegeSet><ValueLists	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
value="Custom" >	Can have one of the following values: <ul style="list-style-type: none"> Modifiable ViewOnly Custom 	ValueListList node will only exist, if <ValueLists value> is "Custom".
<PrivilegeSet><ValueLists><ValueListList>	—	—
<PrivilegeSet><ValueLists><ValueListList><ValueList	—	—
name="Addresses"	—	If name attribute is "[Any New Value List]", then this node will refer to all newly created ValueLists.
id="23" >	—	—
<PrivilegeSet><ValueLists><ValueListList><ValueList><Access	—	—
value="Modifiable">	Can have one of the following values: <ul style="list-style-type: none"> Modifiable ViewOnly NoAccess 	—
<PrivilegeSet><Scripts	—	—
allowCreation="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
value="Custom" >	Can have one of the following values: <ul style="list-style-type: none"> Modifiable ExecutableOnly NoAccess 	ScriptList node will only exist, if <Scripts value> is "Custom".
<PrivilegeSet><Scripts><ScriptList>	—	—
<PrivilegeSet><Scripts><ScriptList><Script	—	—
name="MainScript"	—	If name attribute is "[Any New Script]", then this node will refer to all newly created Scripts.
id="221"	—	—

Tag Name	Value	Description
runFullAccess="True" >	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<PrivilegeSet><Scripts><ScriptList><Script><Access	—	—
value="Modifiable" >	Can have one of the following values: <ul style="list-style-type: none"> ■ Modifiable ■ ExecutableOnly ■ NoAccess 	—

Extended Privilege Section

All nodes below start with <FMPReport><File><ExtendedPrivilegeCatalog>

Tag Name	Value	Description
<ExtendedPrivilege	—	—
name = "fmxml"	—	—
id="1"	—	—
comment = "place comment here" >	—	—
<ExtendedPrivilege><PrivilegeSetList>	—	<PrivilegeSetList> node exists when the current extended privilege is used by other privilege sets.
<ExtendedPrivilege><PrivilegeSetList><PrivilegeSet	—	—
name = "Guest"	—	<PrivilegeSet name> contains a valid privilege set for the current file.
id="123" >	—	—

Authorized Files Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<AuthFileCatalog>	—	—
requireAuthorization	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	Whether external files can reference this file without authorization.
<AuthFileCatalog><Inbound>	—	—
<AuthFileCatalog><Inbound><InboundAuthorization	—	—
filenames = "file1 ; file2"	String of authorized filenames	The filename(s) of the authorized inbound files.

Tag Name	Value	Description
user = "Admin"	String - name of admin user	The identify of the Full Access user account that created the authorization.
date = "7/30/2009 4:15:32 PM"	String - timestamp	The timestamp when the authorization was created.
id = "1">	—	Internal id value.
<AuthFileCatalog><Outbound>	—	—
<AuthFileCatalog><Outbound><OutboundAuthorization	—	—
filenames = "protected_file"	String of authorized filenames	The filename of the protected file this file is authorized to access.
user = "Admin"	String - name of admin user	The identify of the Full Access user account that created the authorization.
date = "7/30/2009 4:15:32 PM"	String - timestamp	The timestamp when the authorization was created.
id = "1">	—	Internal id value.

Custom Menu Set Section

All nodes below start with <FMPPReport><File>

Tag Name	Value	Description
<CustomMenuSetCatalog>	—	May not be present in a file that has never had Manage Custom Menus dialog make changes to it.
<CustomMenuSetCatalog><CustomMenuSet	—	Custom menu set XML element.
name="Menu Set 1"	—	Unique name for the menu set.
id="1">	—	Identifier indicating creation order.
<CustomMenuSetCatalog<CustomMenuSet> <CustomMenuList>	—	—
<CustomMenuSetCatalog<CustomMenuSet> <CustomMenuList><CustomMenu	—	—
name="Custom menu"	—	—
id="1">	—	—
<CustomMenuSetCatalog<CustomMenuSet><Comment>	—	—

Custom Menu Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<CustomMenuCatalog>	May not be present in a file that has never had Manage Custom Menus dialog make changes to it.	—
<CustomMenuCatalog><CustomMenu	—	Custom menu XML element.
name="Menu Name"	—	Unique name for the menu.
d="1">	—	Identifier indicating creation order.
<CustomMenuCatalog><CustomMenu><BaseMenu	—	—
name="Menu Name"	—	—
value="1">	—	—
<CustomMenuCatalog><CustomMenu><Options	—	—
findMode="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu is applicable in Find mode.
browseMode="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu is applicable in Browse mode.
previewMode="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu is applicable in Preview mode.
macPlatform="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu is applicable for the Mac platform. Included only for documenting legacy items, no longer used - see InstallWhen for actual install criteria.
winPlatform="False"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu is applicable for the Windows platform. Included only for documenting legacy items, no longer used - see InstallWhen for actual install criteria.
overrideName="False">	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the custom menu's name property is overridden.
<CustomMenuCatalog><CustomMenu><Title>	—	XML node containing the Title calculation of a custom menu.
<CustomMenuCatalog><CustomMenu><Title><Calculation>	—	—
<CustomMenuCatalog><CustomMenu><Title><DisplayCalculation>	—	—

Tag Name	Value	Description
<CustomMenuCatalog><CustomMenu><InstallWhen>	—	XML node containing the "Install When" calculation of a custom menu, which is used to the exclusion of the legacy platform flags.
<CustomMenuCatalog><CustomMenu><InstallWhen><Calculation>	—	—
<CustomMenuCatalog><CustomMenu><InstallWhen><DisplayCalculation>	—	—
<CustomMenuCatalog><CustomMenu><Comment>	—	XML node containing the comment of a custom menu.
<CustomMenuCatalog><CustomMenu><MenuItemList>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList><MenuItem>	—	—
macPlatform="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem is applicable to the Mac platform. Included only for documenting legacy items, no longer used - see InstallWhen for actual install criteria.
winPlatform="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem is applicable to the Mac platform. Included only for documenting legacy items, no longer used - see InstallWhen for actual install criteria.
<InstallWhen>	—	XML node containing the "Install When" calculation of a custom menu, which is used to the exclusion of the legacy platform flags.
<InstallWhen><Calculation>	—	—
<InstallWhen><DisplayCalculation>	—	—
overrideName="False"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem's name property is overridden.
isSubMenuItem="True"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem is a sub-menu.
specifyScript="False"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem has uses a script to specify an action.
overrideAction="False"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem's action is overridden. It's just a flag to indicate if the internal script step of the menu item is applicable or not. Note This is different then the enable attribute of a script step which indicates if the step is enabled/disabled. For custom menu, the script step is always enabled.

Tag Name	Value	Description
isSeparatorItem="False"	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem is a separator.
overrideShortcut="False">	Can have the following values: <ul style="list-style-type: none"> ■ True ■ False 	Indicates if the MenuItem's shortcut should be overridden.
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><CustomMenu	—	CustomMenu XML node. This XML node exists if the MenuItem is a sub-menu.
name="CustomMenu"	—	—
id="1">	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><Command	—	XML node indicating the FileMaker's menu command id and string if the MenuItem is based on an existing menu command.
name="File Open"	—	—
id="1234">	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><Name>	—	Exists if overrideName is True.
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><Name><Calculation>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><Name><DisplayCalculation>	—	—
<CustomMenuCatalog><CustomMenu><MenuItemList> <MenuItem><Shortcut	—	—
modifier="1"	—	Flags indicating the modifier keys.
key="78">	—	Unicode value of the shortcut key. Special keys are mapped to the User Private Space of 0xe000+ range.
<CustomMenuCatalog><Menu><MenuItemList> <MenuItem><Step>	—	The action of the menu item. This Step node is always reported. The overrideAction attribute will determine if this node is applicable or not.

Custom Function Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<CustomFunctionCatalog>	—	—
<CustomFunctionCatalog><CustomFunction	—	—
name="SalesTax"	—	—
id="1"	—	—
parameters="p1;p2;p3"	—	—

Tag Name	Value	Description
visible="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	If True, the custom function will then be listed in the Calculation Dialog under the function list.
functionArity="n">	0 or N, where N is positive integer	Represents number of parameters for given custom function, 0 or more, can't be negative.
<CustomFunctionCatalog><CustomFunction><DisplayCalculation>	—	—
<CustomFunctionCatalog><CustomFunction><DisplayCalculation><Chunk type="NoRef">SomeText</Chunk>	type can have one of the following values: <ul style="list-style-type: none"> NoRef FunctionRef FieldRef CustomFunctionRef 	—
<CustomFunctionCatalog><CustomFunction><Calculation>	—	This is the body of the custom function which is a calculation.

Script Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<ScriptCatalog>	—	—
<ScriptCatalog><Group	—	A collection of scripts and/or other groups.
name="some_group"	—	—
id="1"	—	—
groupCollapsed="True"	Can have one of the following values: <ul style="list-style-type: none"> True False 	Indicates whether or not this group is collapsed in the UI.
includeInMenu="True">	Can have one of the following values: <ul style="list-style-type: none"> True False 	—
<ScriptCatalog></Group>	—	—
<ScriptCatalog><Script	—	May be contained in a group.
name="MainScript"	—	—
id="122"	—	—

Tag Name	Value	Description
runFullAccess="True"	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
includeInMenu="True" >	Can have one of the following values: <ul style="list-style-type: none"> ■ True ■ False 	—
<ScriptCatalog><Script><StepList>	—	—

Individual Steps are listed under <StepList>. The following table shows the XML grammar per script step.

Notes:

- Many script steps below have options/attributes which are only applicable if certain other options/attributes are enabled or set to a certain value. Examples of this are:
 - find requests for the Perform Find script step (only applicable if the "Specify find requests" checkbox is selected)
 - file, calculation, or text for the Send Event script step (only applicable if the radio button is set to file, calculation, or text, respectively)

For the sake of discussion, let us call the former "conditional" options/attributes and the latter "enabling/determining" options/attributes. Though only applicable when the corresponding enabling/determining option/attribute is appropriately set, once specified, conditional options/attributes may very well be retained even after the enabling/determining option/attribute is changed in such a way that the conditional option/attributes are no longer applicable. This is done for the sake of convenience so that if/when users ever change their minds and switch the enabling/determining option/attribute back, so that the conditional options/attributes are once again applicable, the last entered/chosen values for these conditional options/attributes will still be present.

For example, in the case of a Perform Find script step, previously specified find requests will be retained, even though the user may clear the "Specify find requests" checkbox so that, in case they decide to re-enable it, the last entered find will still be present for convenience. Similarly, in the case of the Send Event script step, a previously specified calculation will be retained, even though the user may switch to specifying a file, so that, in case they decide to switch back to a calculation, the last entered calculation will still be present (again, for convenience).

Because the last entered/chosen values of such currently inapplicable conditional options/attributes are actually stored in the script step itself, corresponding XML for them is therefore generated when a DDR is performed. The fact that such options/attributes are reported should not therefore be construed as somehow implying they are applicable. Their applicability can/should be determined by selecting the XML setting reported by the DDR for the corresponding enabling/determining option/attribute.

- All script steps below contain the element <StepText> and many contain instances of the element <DisplayCalculation>. Both of these elements contain redundant information that only serves to make DDR reports (in particular, HTML ones) more readable.

Area	Name	XMLGrammar	XMLValues	XMLDescription
Control	Perform Script [filename, script]	<pre><Step name="Perform Script" id="1" enable="True"> <StepText>Script step text</StepText> </DisplayCalculation> <Calculation> <![CDATA[5]]> </Calculation> <CurrentScript value="Halt"/> <FileReference name={name} id="1"> <UniversalPathList>{PathList} </UniversalPathList> </FileReference> <Script name="EndOfYear" id="1"/> </Step></pre>	<p><CurrentScript value> when specified for a button can be:</p> <ul style="list-style-type: none"> ■ Halt ■ Exit ■ Pause ■ Resume <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><FileReference> is only required for external scripts.</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p> <p><Calculation> and <DisplayCalculation> nodes will only exist when a script parameter was specified.</p>
Control	Perform Script on Server [filename, script]	<pre><Step name="Perform Script on Server" id="164" enable="True"> <StepText>Script step text</StepText> </DisplayCalculation> <Calculation> <WaitForCompletion state="True"/> <FileReference name={name} id="1"> <UniversalPathList>{PathList} </UniversalPathList> </FileReference> <Script name="EndOfYear" id="1"/> </Step></pre>	<p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><FileReference> is only required for external scripts.</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p> <p><Calculation> and <DisplayCalculation> nodes will only exist when a script parameter was specified.</p>
Control	Pause/Resume Script	<pre><Step name="Pause/Resume Script" id="62" enable="True"> <StepText>Script step text</StepText> <PauseTime value="Indefinitely"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[120]]> </Calculation> </Step></pre>	<p><PauseTime value> can be:</p> <ul style="list-style-type: none"> ■ Indefinitely ■ ForDuration <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><Calculation> node exists when <PauseTime value> is "ForDuration".</p>
Control	Exit Script	<pre><Step id="103" name="Exit Script" enable="True"> <StepText>Script step text</StepText> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	—	—
Control	Halt Script	<pre><Step id="90" name="Halt Script" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Control	If	<pre><Step name="If" id="68" enable="True"> <StepText>Script step text</StepText> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	<Chunk type> can be: <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Control	Else	<pre><Step id="69" name="Else" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Control	End If	<pre><Step id="70" name="End If" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Control	Loop	<pre><Step id="71" name="Loop" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Control	Exit Loop If	<pre><Step id="72" name="Exit Loop If" enable="True"> <StepText>Script step text</StepText> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	<Chunk type> can be: <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Control	End Loop	<pre><Step id="73" name="End Loop" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Control	Allow User Abort	<pre><Step id="85" name="Allow User Abort" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step></pre>	<Set state> can be: <ul style="list-style-type: none"> ■ True ■ False 	—
Control	Set Error Capture	<pre><Step id="86" name="Set Error Capture" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step></pre>	<Set state> can be: <ul style="list-style-type: none"> ■ True ■ False 	—
Control	Set Script Animation	<pre><Step id="84" name="Set Script Animation" enable="true" "false"> <StepText>Script step text</StepText> <Set state="true" "false"/> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Navigation	Go to Layout	<pre> <Step id="6" name="Go to Layout" enable="True"> <StepText>Script step text</StepText> <LayoutDestination value="SelectedLayout"/> <Layout name="LayoutName" id="1"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Layout> </Step> </pre>	<p><LayoutDestination value> can be:</p> <ul style="list-style-type: none"> ■ OriginalLayout ■ LayoutNameByCalc ■ LayoutNumberByCalc ■ SelectedLayout <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><Layout> element is only output if <LayoutLocation value> is not "OriginalLayout"</p> <p><Calculation> element is only output if <LayoutDestination value> is "LayoutNameByCalc" or "LayoutNumberByCalc".</p> <p><Layout id> is required in case there is more than one layout with the same name.</p>
Navigation	Go to Record/Request/Page	<pre> <Step id="16" name="Go to Record/Request/Page" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Exit state="False"/> <RowPageLocation value="ByCalculation"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step> </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Exit state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><RowPageLocation value> can be:</p> <ul style="list-style-type: none"> ■ First ■ Last ■ Previous ■ Next ■ ByCalculation <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><NoInteract> and <Calculation> nodes are present when <RowPageLocation value> attribute is "ByCalculation".</p> <p><Exit> element is only present when <RowPageLocation value> is "Next" or "Previous".</p> <p><Exit state> indicates whether script execution should be terminated if there is no next/previous record/request/page (i.e. if the current record/request/page is the last/first one).</p>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Navigation	Go to Related Record	<pre> <Step id="74" name="Go to Related Record" enable="True"> <StepText>Script step text</StepText> <Option state="true"/> <ShowInNewWindow state="true"/> <Restore state="true"/> <MatchAllRecords state="true"/> <Table name={TableName} id={id value}/> <LayoutDestination value="SelectedLayout"/> <Layout name={LayoutName} id={id value}/> <Name> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Name> <Height> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Height> <Width> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Width> <DistanceFromTop> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </DistanceFromTop> <DistanceFromLeft> <Calculation> <![CDATA[1221]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </DistanceFromLeft> </Step> </pre>	<pre> <Option state> can be: ■ True ■ False <ShowInNewWindow state> can be: ■ True ■ False <Restore state> can be: ■ True ■ False <MatchAllRecords state> can be: ■ True ■ False <LayoutDestination value> can be: ■ CurrentLayout ■ LayoutNameByCalc ■ LayoutNumberByCalc ■ SelectedLayout <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef </pre>	<pre> <Option> is used to denote state of "Use external table's layout" checkbox. <Restore> element is used to denote state of "Show all related records in new found set" checkbox. <Layout> element is only output if <LayoutLocation value> is not "CurrentLayout" <Calculation> element is only output if <LayoutDestination value> is "LayoutNameByCalc" or "LayoutNumberByCalc". </pre>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Navigation	Go to Portal Row	<pre><Step id="99" name="Go to Portal Row" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <SelectAll state="False"/> <Exit state="False"/> <RowPageLocation value="ByCalculation"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><SelectAll state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Exit state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><RowPageLocation value> can be:</p> <ul style="list-style-type: none"> ■ First ■ Last ■ Previous ■ Next ■ ByCalculation <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><NoInteract> and <Calculation> nodes are present when <RowPageLocation value> attribute is "ByCalculation".</p> <p><Exit> element is only present when <RowPageLocation value> is "Next" or "Previous".</p> <p><Exit state> indicates whether script execution should be terminated if there is no next/previous row in the portal (i.e. if the current row is the last/first one in the portal).</p>
Navigation	Go To Field	<pre><Step id="17" name="Go to Field" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="FieldName" id="2" table="TableName"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<p><SelectAll state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	—
Navigation	Go To Next Field	<pre><Step id="4" name="Go to Next Field" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Navigation	Go To Previous Field	<pre><Step id="5" name="Go to Previous Field" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Navigation	Close Popover	<pre><Step id="169" name="Close Popover" enable="True"> <StepText>Close Popover</StepText> </Step></pre>	—	—
Navigation	Enter Browse Mode	<pre><Step id="55" name="Enter Browse Mode" enable="True"> <StepText>Script step text</StepText> <Pause state="True"/> </Step></pre>	<p><Pause state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Navigation	Enter Find Mode	<pre><Step id="22" name="Enter Find Mode" enable="True"> <StepText>Script step text</StepText> <Pause state="True"/> {See Perform Find for remaining XML} </Step></pre>	<p><Pause state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p>{See Perform Find for remaining details.}</p>	{See Perform Find. }
Navigation	Enter Preview Mode	<pre><Step id="41" name="Enter Preview Mode" enable="True"> <StepText>Script step text</StepText> <Pause state="True"/> </Step></pre>	<p><Pause state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	—
Found Sets	Sort Records	<pre><Step id="39" name="Sort Records" enable="True"> <StepText>Script step text</StepText> <NoInteract state="False"/> <Restore state="True"/> <SortList> <Sort type="Descending"> <PrimaryField> <Field name="f1" id="1" table="test123"/> </PrimaryField> </Sort> <Sort type="Ascending"> <PrimaryField> <Field name="f4" id="2" table="test123"/> </PrimaryField> <SummaryField> <Field name="summary" id="3" table="test123"/> </SummaryField> <OverrideLanguage language="Japanese"/> </Sort> <Sort type="Custom"> <PrimaryField> <Field name="f5" id="4" table="test123"/> </PrimaryField> <ValueList name="New Value List" id="1"/> </Sort> </SortList> </Step></pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Restore state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Sort type> can be:</p> <ul style="list-style-type: none"> ■ Ascending ■ Descending ■ Custom <p><OverrideLanguage language> can be:</p> <ul style="list-style-type: none"> ■ English ■ Japanese ■ ... 	<p><ValueList> node exists if <Sort type> is "Custom"</p> <p><SummaryField> and <OverrideLanguage> sub-nodes are optional.</p>
Found Sets	Unsort Records	<pre><Step id="21" name="Unsort Records" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Found Sets	Show All Records	<pre><Step id="23" name="Show All Records" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Found Sets	Show Omitted Only	<pre><Step id="27" name="Show Omitted Only" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Found Sets	Omit Record	<pre><Step id="25" name="Omit Record" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Found Sets	Omit Multiple Records	<pre><Step id="26" name="Omit Multiple Records" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—
Found Sets	Perform Find	<pre><Step id="28" name="Perform Find" enable="True"> <StepText>Script step text</StepText> <Restore state="True"/> <Query table="test123"> <RequestRow operation="Include"> <Criteria> <Text>&gt; 11</Text> <Field name="f2" id="2" repetition="2" table="test123"/> </Criteria> <Criteria> <Text>&lt; 23</Text> <Field name="f3" id="2" repetition="2" table="test123"/> </Criteria> </RequestRow> <RequestRow operation="Exclude"> <Criteria> <Text>&gt; &quot;wow&quot;</Text> <Field name="f3" id="2" repetition="2" table="test123"/> </Criteria> <Criteria> <Text>&gt; test</Text> <Field name="f4" id="2" repetition="2" table="test123"/> </Criteria> <Criteria> <Text>&gt; &quot;hello there </Text> <Field name="f5" id="2" repetition="2" table="test123"/> </Criteria> </RequestRow> </Query> </Step></pre>	<pre><Restore state> can be: ■ True ■ False <RequestRow operation> can be: ■ Include ■ Exclude</pre>	<p>Query node can have 1 or more RequestRow sub-nodes.</p> <p>Each RequestRow node can in turn have 1 or more Criteria sub-nodes.</p> <p><Text> contains the actual criteria itself that will be applied to <Field>.</p> <p><Field repetition> is only output if > 1.</p>
Found Sets	Perform Quick Find	<pre><Step enable="True" id="150" name="Perform Quick Find"> <StepText>Script step text</StepText> <Calculation> <![CDATA["Value"]] > </Calculation> <DisplayCalculation> <Chunk type="NoRef">"Value"</Chunk> </DisplayCalculation> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Found Sets	Find Matching Records	<pre><Step enable="True" id="155" name="Find Matching Records"> <StepText>Find Matching Records [Replace]</StepText> <FindMatchingRecordsByField value="FindMatchingReplace"/> </Step></pre>	<pre><FindMatchingRecordsByField> can be: ■ FindMatchingReplace ■ FindMatchingConstrain ■ FindMatchingExtend</pre>	—
Found Sets	Sort Records by Field	<pre><Step enable="True" id="154" name="Sort Records by Field"> <StepText>Sort Records by Field [Ascending]</StepText> <SortRecordsByField value="SortAscending"/> </Step></pre>	<pre><SortRecordsByField> can be: ■ SortAscending ■ SortDescending ■ SortValueList</pre>	—
Found Sets	Modify Last Find	<pre><Step id="24" name="Modify Last Find" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Sort/Find/Print	Print Setup	<pre><Step id="42" name="Print Setup" enable="True"> <StepText>Script step text</StepText> <NoInteract state="False"/> <Restore state="true"> <PageFormat PaperTop="0" PaperLeft="0" PaperBottom="3300" PaperRight="2550" PrintableWidth="3150" PrintableHeight="2250" ScaleFactor="1" PageOrientation="Portrait"> <PlatformData PlatformType={PlatformType}> <![CDATA[{{Flattened Windows/Mac specific settings}}]> </PlatformData> </Format> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <Restore state> can be: ■ True ■ False <PageFormat PageOrientation> can be: ■ Portrait ■ ReversePortrait ■ Landscape ■ ReverseLandscape</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Sort/Find/Print	Print	<pre><Step id="43" name="Print" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Restore state="true"> <PrintSettings PrintType="BrowsedRecords" NumCopies="1" collated="True" AllPages="False" FromPage="1" ToPage="5" PrintToFile="False" PageNumberingOffset="1"> <PlatformData PlatformType={PlatformType}> <![CDATA[{Flattened Windows/Mac specific settings}]]> </PlatformData> </PrintSettings> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <Restore state> can be: ■ True ■ False <PrintSettings PrintType> can be: ■ BrowsedRecords ■ CurrentRecord ■ BlankAsFormatted ■ BlankBoxed ■ BlankUnderscore <PrintSettings collated> can be: ■ True ■ False <PrintSettings AllPages> can be: ■ True ■ False <PrintSettings PrintToFile> can be: ■ True ■ False See Print Setup for details on PageFormat element.</pre>	—
Editing	Undo/Redo	<pre><Step id="45" name="Undo/Redo" enable="True"> <StepText>Script step text</StepText> <UndoRedo value="Toggle"/> </Step></pre>	<pre><UndoRedo value> can be: ■ Undo ■ Redo ■ Toggle</pre>	—
Editing	Cut	<pre><Step id="46" name="Cut" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Editing	Copy	<pre><Step id="47" name="Copy" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Editing	Paste	<pre><Step id="48" name="Paste" enable="True"> <StepText>Script step text</StepText> <NoStyle state="True"/> <SelectAll state="True"/> <LinkAvail state="True"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><NoStyle state> can be: ■ True ■ False <SelectAll state> can be: ■ True ■ False <LinkAvail state> can be: ■ True ■ False</pre>	—
Editing	Clear	<pre><Step id="49" name="Clear" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f4" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Editing	Select All	<pre><Step id="50" name="Select All" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Set Field	<pre><Step id="76" name="Set Field" enable="True"> <StepText>Script step text</StepText> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—
Fields	Insert Text	<pre><Step id="61" name="Insert Text" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Text>&quot;Text to insert&quot;</Text> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Fields	Insert Calculated Result	<pre><Step id="77" name="Insert Calculated Result" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert from Device	<pre> <Step id="161" name="Insert from Device" enable="True" type="Music Library"> <StepText>Script step text</StepText> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> <Step id="161" name="Insert from Device" enable="True" type="Photo Library"> <StepText>Script step text</StepText> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> <Step id="161" name="Insert from Device" enable="True" type="Camera,Still"> <StepText>Script step text</StepText> <Camera Choice="Front" "Back"/> <Resolution Choice="full" "small" "medium" "large"/> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>	<pre> <barcode_bitmask32> can be: ■ 0x0001 = BARCODE_Code1 28 ■ 0x0002 = BARCODE_Code3 9_PDF417 ■ 0x0004 = BARCODE_EAN8 ■ 0x0008 = BARCODE_GS1_D ataBar_Expanded ■ 0x0010 = BARCODE_GS1_D ataBar_RSS ■ 0x0020 = BARCODE_Interle ved2of5 ■ 0x0040 = BARCODE_ISBN1 0 ■ 0x0080 = BARCODE_ISBN1 3 ■ 0x0100 = BARCODE_QR_Co de ■ 0x0200 = BARCODE_UPC_A _EAN13 ■ 0x0400 = BARCODE_UPC_E </pre>	—
	(continued on next page)			

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert from Device <i>(continued from previous page)</i>	<pre> <Step id="161" name="Insert from Device" enable="True" type="Bar Code"> <StepText>Script step text</StepText> <Image Source="Camera"Field"/> <Camera Choice="front"Back"/> <BarCodes Types=<barcode_bitmask32/> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> <ScanFrom> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </ScanFrom> </Step> <Step id="161" name="Insert from Device" enable="True" type="Signature"> <StepText>Script step text</StepText> <Field name="f1" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>		

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert from Index	<pre><Step id="11" name="Insert from Index" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f2" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Fields	Insert from Last Visited	<pre><Step id="12" name="Insert from Last Visited" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be ■ True ■ False</pre>	—
Fields	Insert from URL	<pre><Step enable="True" id="160" name="Insert from URL"> <StepText>Insert from URL [Sales::Report; "http://www.filemaker.com/sales_report.pdf"] [Select; No dialog]</StepText> <NoInteract state="True"/> <SelectAll state="True"/> </DisplayCalculation> <Calculation> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <SelectAll state> can be: ■ True ■ False</pre>	—
Fields	Insert Current Date	<pre><Step id="13" name="Insert Current Date" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert Current Time	<pre><Step id="14" name="Insert Current Time" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f4" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Fields	Insert Current User Name	<pre><Step id="60" name="Insert Current User Name" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f4" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Fields	Insert Picture	<pre><Step id="56" name="Insert Picture" enable="True"> <StepText>Script step text</StepText> <UniversalPathList type="Reference">{PathList} </UniversalPathList> </Step></pre>	<pre><UniversalPathList type> can be: ■ Reference ■ Embedded</pre>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Fields	Insert PDF	<pre><Step enable="True" id="158" name="Insert PDF"> <StepText>Insert PDF [] </StepText> <UniversalPathList type="Reference">{PathList} </UniversalPathList> </Step></pre>	<pre><UniversalPathList type> can be: ■ Reference ■ Embedded</pre>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Fields	Insert Audio/Video	<pre><Step enable="True" id="159" name="Insert Audio/Video"> <StepText>Insert Audio/Video [] </StepText> <UniversalPathList type="Reference">{PathList} </UniversalPathList> </Step></pre>	<pre><UniversalPathList type> can be: ■ Reference ■ Embedded</pre>	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Fields	Insert QuickTime	<pre><Step id="59" name="Insert QuickTime" enable="True"> <StepText>Script step text</StepText> <UniversalPathList>{PathList} </UniversalPathList> </Step></pre>	—	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert Object	<pre><Step id="78" name="#[OBSOLETE]Insert Object" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> <UniversalPathList>{PathList} </UniversalPathList> <OLEData> <![CDATA[{OLE data}]]> </OLEData> <ObjectType>{Object Type}</ObjectType> </Step></pre>	<pre><Set state> can be: ■ True ■ False</pre>	<p><UniversalPath> is only present if the inserted object is of type "Create from File".</p> <p>Note : Although it makes sense for the <UniversalPathList reference> attribute to be supported for this script step, the setting of the "Link" checkbox in the Insert Object dialog is actually stored in the OLEData element's CDATA, despite the fact that the file chosen via this dialog is not (since it is stored in the <UniversalPathList> element).</p> <p>It is no longer possible to create this script, although you can have the step in a converted file.</p>
Fields	Update Link	<pre><Step id="96" name="#[OBSOLETE]Update Link" enable="True"> <StepText>Script step text</StepText> <Field name="f2" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">{13}</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	—	It is no longer possible to create this script, although you can have the step in a converted file.
Records	New Record/ Request	<pre><Step id="7" name="New Record/Request" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Records	Duplicate Record/ Request	<pre><Step id="8" name="Duplicate Record/Request" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Records	Delete Record/ Request	<pre><Step id="9" name="Delete Record/Request" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Delete Portal Row	<pre><Step id="104" name="Delete Portal Row" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False</pre>	—
Records	Revert Record/Request	<pre><Step id="51" name="Revert Record/Request" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False</pre>	—
Records	Commit Records/Requests	<pre><Step id="75" name="Commit Records/Requests" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Option state="true"/> <ESSForceCommit state="True"> </ESSForceCommit> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <Option state> can be: ■ True ■ False</pre>	—
Records	Copy Record/Request	<pre><Step id="101" name="Copy Record/Request" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Records	Copy All Records/Requests	<pre><Step id="98" name="Copy All Records/Requests" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Records	Delete All Records	<pre><Step id="10" name="Delete All Records" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False</pre>	—
Fields	Replace Field Contents	<pre><Step id="91" name="Replace Field Contents" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <With value="None"> </Step> <Step id="91" name="Replace Field Contents" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <With value="CurrentContents"> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">{13}</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre> <p><i>(continued on next page)</i></p>	<pre><NoInteract state> can be: ■ True ■ False <With value> can be: ■ None ■ CurrentContents ■ SerialNumbers ■ Calculation <SerialNumbers UseEntryOptions> can be: ■ True ■ False <SerialNumbers UpdateEntryOptions> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	<pre><With value> reflects the user's choice of what to replace the specified fields contents with. <SerialNumbers> is present when <With value> is "SerialNumbers". <SerialNumbers InitialValue> and <SerialNumbers Increment> can optionally be used to control serial number generation. <Calculation> is present when <With value> is "Calculation".</pre>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Replace Field Contents <i>(continued from previous page)</i>	<pre> <Step id="91" name="Replace Field Contents" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <With value="SerialNumbers"> <SerialNumbers UseEntryOptions="False" InitialValue="0" Increment="1" UpdateEntryOptions="False"/> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> <Step id="91" name="Replace Field Contents" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <With value="Calculation"> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[Abs (f3)]]> </Calculation> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>		
Fields	Relookup Field Contents	<pre> <Step id="40" name="Relookup Field Contents" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Field name="f2" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>	<NoInteract state> can be: <ul style="list-style-type: none"> ■ True ■ False 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Import Records	<pre> <Step id="35" name="Import Records" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <NotWinStep state="True"/> <Restore state="True"/> <DataSourceType value="File"/> {for Excel file data source (specified in <UniversalPathList>): <Profile DataType="XLS" FirstRowsData="True" SelectedSheet={sheet} WorksheetName={SheetName}> } {for non-Excel file data source (specified in <UniversalPathList>): <Profile DataType={DataType} FirstRowsData="True"/> } {for folder data source (specified in <UniversalPathList>): <Profile DataType="BTCH" FirstRowsData="True" IncludeEnclosedFolders="True" PictureAndMovieImport="True" ImportByReference="True"/> </Profile> } {for image capture data source : <Profile DataType="IMGC" FirstRowsData="True" DeviceName={DeviceName} DownloadType="AllImages" NumImagesToImport="1" ImportByReference="True" DownloadLocation="PicturesFolder" CustomFolderName={CustomFolderName} ThumbnailSize="LargeThumbnail"/> } {for Bento data source : <Profile DataType="BENT" FirstRowsData="False" SelectedBentoLib={LibID} SelectedBentoLibName={LibName} SelectedBentoTable={TableID} SelectedBentoTableName={TableName} SelectedTablesCollection={collection} } } </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><NotWinStep state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Restore state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><DataSourceType value> can be:</p> <ul style="list-style-type: none"> ■ File ■ Folder ■ BentoSource ■ XMLSource ■ ODBCSource <p><Profile FirstRowsData> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Profile ImportByReference> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Profile IncludeEnclosedFolders> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Profile PictureAndMovieImport> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Profile DownloadType> can be:</p> <ul style="list-style-type: none"> ■ AllImages ■ SomelImages ■ LastXImages <p><collection> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Profile DownloadLocation> can be:</p> <ul style="list-style-type: none"> ■ PicturesFolder ■ CustomFolder <p><Profile ThumbnailSize> can be:</p> <ul style="list-style-type: none"> ■ LargeThumbnail ■ MediumThumbnail ■ SmallThumbnail 	<p><AddRemainingRecords> is only meaningful when method value is "UpdateOnMatch".</p> <p><TargetFields> contains a list of all fields in the destination table. Entries that are blank are represented by an empty field node </Field>.</p> <p><XMLFile> is only present if <Profile XMLType> is "XMLFile"</p> <p>{PathList} in <XMLFile> is the same as that in <UniversalPathList></p> <p><XMLHttp> is only present if <Profile XMLType> is "XMLHttp"</p> <p><XMLCalc> is only present if <Profile XMLType> is "XMLCalculation"</p> <p><XSLFile> is only present if <Profile XSLType> is "XSLFile"</p> <p><XSLHttp> is only present if <Profile XSLType> is "XSLHttp"</p> <p><XSLCalc> is only present if <Profile XSLType> is "XSLCalculation"</p> <p><QueryCalc> is only present if <Profile QueryType> is "Calculation"</p> <p><Query> is only present if <Profile QueryType> is "Query"</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
				(continued on next page)

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Import Records <i>(continued from previous page)</i>	<pre> {for XML data source : <Profile DataType="XML " FirstRowsData="True" XMLType="XMLFile" XSLType="XSLFile"> <XMLFile>{PathList}</XMLFile> <XMLHttp>{http}</XMLHttp> <XMLCalc> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </XMLCalc> <XSLFile> <UniversalPathList>{PathList} </UniversalPathList> </XSLFile> <XSLHttp>{http}</XSLHttp> <XSLCalc> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </XSLCalc> </Profile> } {for ODBC data source : <Profile DataType="ODBC" FirstRowsData="True" dsn={Dsn} UserName={UserName} password={Password} flags={flags} QueryType="Query"> <QueryCalc> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </QueryCalc> <Query>{QueryText}</Query> </Profile> } </pre>	<p><Profile XMLType> can be:</p> <ul style="list-style-type: none"> ■ NoXML ■ XMLFile ■ XMLHttp ■ XMLCalculation <p><Profile XSLType> can be:</p> <ul style="list-style-type: none"> ■ NoXSL ■ XSLFile ■ XSLHttp ■ XSLCalculation <p><Profile QueryType> can be:</p> <ul style="list-style-type: none"> ■ Query ■ Calculation <p><ImportOptions method> can be:</p> <ul style="list-style-type: none"> ■ Add ■ Update ■ UpdateOnMatch <p><ImportOptions SplitRepetitions> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><ImportOptions AutoEnter> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><ImportOptions AddRemainingRecords> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><ImportOptions CharacterSet> can be:</p> <ul style="list-style-type: none"> ■ Windows ■ DOS ■ Macintosh ■ Unicode ■ UnicodeBE ■ UTF-8 ■ ShiftJIS ■ ChineseSimplified ■ ChineseTraditional <p><Field Map> can be:</p> <ul style="list-style-type: none"> ■ Import ■ Match ■ DoNotImport <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p>For a request to import into a new table:</p> <ul style="list-style-type: none"> ■ <Table> element. is absent ■ {FieldName} for each <Field> element child of <TargetFields> element is index of field from data source to import into that target field. Each target field's actual name will be determined by the name of the corresponding source field in the same position (as previously established in the Import Mapping dialog) when the script step is eventually performed.
	<i>(continued on next page)</i>			

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Export Records <i>(continued from previous page))</i>	<pre> <ExportEntries> <ExportEntry> <Field name={FieldName} id="2" repetition="2" table={Table}/> <Field name={FieldName} id="2" repetition="2" table={Table}/> </ExportEntry> ... </ExportEntries> <SummaryFields> <Field name={FieldName} id="2" repetition="2" table={Table}/> <Field name={FieldName} id="2" repetition="2" table={Table}/> ... </SummaryFields> </Step> </pre>	<p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	
Windows	Freeze Window	<pre> <Step id="79" name="Freeze Window" enable="True"> <StepText>Script step text</StepText> </Step> </pre>	—	—
Windows	Refresh Window	<pre> <Step id="80" name="Refresh Window" enable="True"> <StepText>Script step text</StepText> <Option state="True" /> <FlushSQLData state="True" /> </Step> </pre>	<p><Option state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><FlushSQLData state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	<p><Option> corresponds to the "flush cached join results" option.</p> <p><FlushSQLData> corresponds to the "flush cached SQL data" option.</p>
Windows	Scroll Window	<pre> <Step id="81" name="Scroll Window" enable="True"> <StepText>Script step text</StepText> <ScrollOperation value="Home"/> </Step> </pre>	<p><ScrollOperation value> can be:</p> <ul style="list-style-type: none"> ■ Home ■ End ■ PageUp ■ PageDown ■ ToSelection 	—
Windows	Show/Hide Menubar	<pre> <Step id="166" name="Show/Hide Menubar" enable="True"> <StepText>Show/Hide Menubar</StepText> <ShowHide value="Toggle"/> </Step> </pre>	<p><ShowHide value> can be:</p> <ul style="list-style-type: none"> ■ Show ■ Hide ■ Toggle 	Script step only available for FileMaker WebDirect.
Windows	Adjust Window	<pre> <Step id="31" name="Adjust Window" enable="True"> <StepText>Script step text</StepText> <WindowState value="Maximize"/> </Step> </pre>	<p><WindowState value> can be:</p> <ul style="list-style-type: none"> ■ ResizeToFit ■ Maximize ■ Minimize ■ Restore ■ Hide 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Windows	Show/Hide Toolbars	<pre><Step id="29" name="Show/Hide Toolbars" enable="True"> <StepText>Script step text</StepText> <Lock state="True"/> <ShowHide value="Hide"/> </Step></pre>	<p><Lock state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><ShowHide value> can be:</p> <ul style="list-style-type: none"> ■ Show ■ Hide ■ Toggle 	—
Windows	Show/Hide Text Ruler	<pre><Step id="92" name="Show/Hide Text Ruler" enable="True"> <StepText>Script step text</StepText> <ShowHide value="Hide"/> </Step></pre>	<p><ShowHide value> can be:</p> <ul style="list-style-type: none"> ■ Show ■ Hide ■ Toggle 	—
Windows	Set Zoom Level	<pre><Step id="97" name="Set Zoom Level" enable="True"> <StepText>Script step text</StepText> <Lock state="True"/> <Zoom value="75"/> </Step></pre>	<p><Lock state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Zoom value> can be:</p> <ul style="list-style-type: none"> ■ 25 ■ 50 ■ 75 ■ 100 ■ 150 ■ 200 ■ 300 ■ 400 ■ ZoomIn ■ ZoomOut 	—
Windows	View As	<pre><Step id="30" name="View As" enable="True"> <StepText>Script step text</StepText> <View value="Form"/> </Step></pre>	<p><View value> can be:</p> <ul style="list-style-type: none"> ■ Form ■ List ■ Table ■ Cycle 	—
Files	New File	<pre><Step id="82" name="New File" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Files	Open File	<pre> <Step id="33" name="Open File" enable="True"> <StepText>Script step text</StepText> <Option state="True"/> {For a FileMaker data source: <FileReference name={name} id="1"> <UniversalPathList>{PathList} </UniversalPathList> </FileReference> } {For an ODBC data source: <OdbcDataSource name={name} id="1" DSN="..." promptForLogin="False"> <Username> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Username> <Password> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Password> <FilterTables tableName="{TableName}" schemaName="{SchemaName}" catalogName="{CatalogName}" typeBasedFilter="True" retrieveTables="True" retrieveViews="True" retrieveSystemTables="True"/> </OdbcDataSource> } </Step> </pre>	<pre> <Option state> can be: ■ True ■ False <OdbcDataSource promptForLogin> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef <FilterTables typeBasedFilter> can be: ■ True ■ False <FilterTables retrieveTables> can be: ■ True ■ False <FilterTables retrieveViews> can be: ■ True ■ False <FilterTables retrieveSystemTables> can be: ■ True ■ False </pre>	<pre> {PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time. <Username> and <Password> are present only if <OdbcDataSource promptForLogin> is "False" (i.e. user has entered login credentials for the ODBC data source). </pre>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Files	Close File	<pre> <Step id="34" name="Close File" enable="True"> <StepText>Script step text</StepText> {For a FileMaker data source: <FileReference name={name} id="1"> <UniversalPathList>{PathList} </UniversalPathList> </FileReference> } {For an ODBC data source: <OdbcDataSource name={name} id="1" DSN="..." promptForLogin="False"> <Username> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Username> <Password> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Password> <FilterTables tableName="{TableName}" schemaName="{SchemaName}" catalogName="{CatalogName}" typeBasedFilter="True" retrieveTables="True" retrieveViews="True" retrieveSystemTables="True"/> </OdbcDataSource> } </Step> </pre>	<pre> <OdbcDataSource promptForLogin> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef <FilterTables typeBasedFilter> can be: ■ True ■ False <FilterTables retrieveTables> can be: ■ True ■ False <FilterTables retrieveViews> can be: ■ True ■ False <FilterTables retrieveSystemTables> can be: ■ True ■ False </pre>	<p>If neither <FileReference> nor <OdbcDataSource> nodes are present, the current file is closed.</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p> <p><Username> and <Password> are present only if <OdbcDataSource promptForLogin> is "False" (i.e. user has entered login credentials for the ODBC data source).</p>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Account	Change Password	<pre><Step id="83" name="Change Password" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <OldPassword> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]]> </Calculation> </OldPassword> <NewPassword> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]]> </Calculation> </NewPassword> </Step></pre>	<p><StepText> contains the full detailed description of this script step along with its options. The contents of this node are the same as the ones that will get printed part of script definition print.</p> <p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Files	Set Multi-User	<pre><Step id="84" name="Set Multi-User" enable="True"> <StepText>Script step text</StepText> <MultiUser value="True"/> </Step></pre>	<p><MultiUser value> can be:</p> <ul style="list-style-type: none"> ■ True ■ False ■ OnHidden 	—
Files	Set Use System Formats	<pre><Step id="94" name="Set Use System Formats" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step></pre>	<p><Set state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	—
Files	Save a Copy As	<pre><Step id="37" name="Save a Copy as" enable="True"> <StepText>Script step text</StepText> <AutoOpen state="True"/> <CreateEmail state="True"/> <SaveAsType value="Copy"/> <UniversalPathList>{PathList} </UniversalPathList> </Step></pre>	<p><SaveAsType value> can be:</p> <ul style="list-style-type: none"> ■ Copy ■ CompactedCopy ■ SelfContainedCopy ■ Clone <p><AutoOpen state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><CreateEmail state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Files	Recover File	<pre><Step id="95" name="Recover File" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <UniversalPathList>{PathList} </UniversalPathList> </Step></pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XMLGrammar	XMLValues	XMLDescription
Spelling	Check Selection	<pre><Step id="18" name="Check Selection" enable="True"> <StepText>Script step text</StepText> <SelectAll state="True"/> <Field name="f2" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><SelectAll state> can be: ■ True ■ False</pre>	—
Spelling	Check Record	<pre><Step id="19" name="Check Record" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Spelling	Check Found Set	<pre><Step id="20" name="Check Found Set" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Spelling	Correct Word	<pre><Step id="106" name="Correct Word" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Spelling	Spelling Options	<pre><Step id="107" name="Spelling Options" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Spelling	Select Dictionaries	<pre><Step id="108" name="Select Dictionaries" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Spelling	Edit User Dictionary	<pre><Step id="109" name="Edit User Dictionary" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Open Menu Item	Open Preferences	<pre><Step id="105" name="Open Preferences" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Open Menu Item	Open File Options	<pre><Step id="114" name="Open File Options" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Open Menu Item	Open Manage Containers	<pre><Step enable="True" id="156" name="Open Manage Containers"> <StepText>Open Manage Containers</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Open Menu Item	Open Manage Database	<Step id="38" name="Open Manage Database" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Manage Layouts	<Step id="151" name="Open Manage Layouts " enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Manage Value Lists	<Step id="112" name="Open Manage Value Lists" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Manage Themes	<Step id="165" name="Open Manage Themes" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Help	<Step id="32" name="Open Help" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Remote	<Step id="118" name="Open Remote" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Manage Scripts	<Step id="88" name="Open Manage Scripts" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Open Sharing	<Step id="113" name="Open Sharing" enable="True"> <StepText>Script step text</StepText> </Step>	—	—
Open Menu Item	Upload to FileMaker Server	<Step id="172" name="Upload to FileMaker Server" enable="True"> <StepText>Script step text</StepText> </Step>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Show Custom Dialog	<pre> <Step id="87" name="Show Custom Dialog" enable="True"> <StepText>Script step text</StepText> <Title> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </Title> <Message> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </Message> <Buttons> <Button CommitState="True"> <Calculation> <![CDATA["OK"]> </Calculation> <DisplayCalculation> <Chunk type="NoRef">"OK"</Chunk> </DisplayCalculation> </Button> <Button CommitState="False"> <Calculation> <![CDATA["Cancel"]> </Calculation> <DisplayCalculation> <Chunk type="NoRef">"Cancel"</Chunk> </DisplayCalculation> </Button> <Button CommitState="False"> <Calculation> <![CDATA[Get(CurrentTime)]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Get</Chunk> <Chunk type="NoRef"></Chunk> <Chunk type="FunctionRef"> CurrentTime</Chunk> <Chunk type="NoRef"></Chunk> </DisplayCalculation> </Button> </Buttons> </pre>	<pre> <Button CommitState> can be: ■ True ■ False <InputField UsePasswordCharacter> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef </pre>	<Field repetition> is only output if > 1
	(continued on next page)			

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Show Custom Dialog <i>(continued from previous page))</i>	<pre> <InputFields> <InputField UsePasswordCharacter="True"> <Field name={FieldName} id="2" repetition="2" table={Table}/> <Label> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </Label> </InputField> ... </InputField> ... </InputFields> </Step> </pre>		
Miscellaneous	Allow Formatting Bar	<pre> <Step id="115" name="Allow Formatting Bar" enable="True"> <StepText>Script step text</StepText> <Set state="True"/> </Step> </pre>	<pre> <Set state> can be: ■ True ■ False </pre>	—
Miscellaneous	Refresh Object	<pre> <Step id="167" name="Refresh Object" enable="True"> <StepText>Script step text</StepText> <ObjectName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </ObjectName> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Repetition> </Step> </pre>	—	—
Miscellaneous	Beep	<pre> <Step id="93" name="Beep" enable="True"> <StepText>Script step text</StepText> </Step> </pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Speak (Mac)	<pre><Step id="66" name="Speak" enable="True"> <StepText>Script step text</StepText> <SpeechOptions VoiceCreator={voice creator} VoiceId={voice id} VoiceName={voice name} WaitForCompletion="True"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Step></pre>	<pre><Speech WaitForCompletion> can be: ■ True ■ False <SpeechOptions VoiceCreator> is a four character string. <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	<pre><SpeechOptions VoiceName> is only generated on the Mac and contains redundant information that only serves to make DDR reports (in particular HTML ones) more readable.</pre>
Miscellaneous	Dial Phone	<pre><Step id="65" name="Dial Phone" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <UseDialPreferences value="True"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[613-667-5030]]> </Calculation> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <UseDialPreferences value> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—
Miscellaneous	Install Plug-In File	<pre><Step id="157" name="Install Plug-In File" enable="True"> <StepText>Install Plug-In File [test:f1]</StepText> <Field table="..." id="2" name="..."/> </Step></pre>	—	—
Miscellaneous	Open URL	<pre><Step id="111" name="Open URL" enable="True"> <StepText>Open URL</StepText> <NoInteract state="True"/> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["http://www.filemaker.com"]]> </Calculation> </Step></pre>	<pre><NoInteract state> can be: ■ True ■ False <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Send Mail	<pre> <Step id="63" name="Send Mail" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Attachment> <UniversalPathList>{PathList} </UniversalPathList> </Attachment> <To UseFoundSet="True"> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </To> <Cc UseFoundSet="True"> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Cc> <Bcc UseFoundSet="True"> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[<Step id="63" name="Send Mail"> </Calculation> </Bcc> <Subject> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Subject"]]> </Calculation> </Subject> <Message> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Message"]]> </Calculation> </Message> </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><MultipleEmails state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><SMTPAuthenticationType> can be:</p> <ul style="list-style-type: none"> ■ SMTPAuthenticationNone ■ SMTPAuthenticationPlain ■ SMTPAuthenticationCramMD5 <p><To/Cc/Bcc UseFoundSet> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef <p>encryptionVal could be one of these:</p> <ul style="list-style-type: none"> ■ SMTPEncryptionNone ■ MTPEncryptionSSL ■ SMTPEncryptionTLS 	<p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
	(continued on next page)			

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	<p data-bbox="289 243 431 384">Send Mail <i>(continued from previous page)</i></p> <p data-bbox="289 1738 431 1791"><i>(continued on next page)</i></p>	<pre data-bbox="448 243 891 1818"> <SMTPNameDescription> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPNameDescription> <SMTPEmailAddress > <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPEmailAddress> <SMTPReplyAddress > <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPReplyAddress> <SMTPServer> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPServer> <SMTPPort > <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPPort> <SMTPUserName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPUserName> </pre>		

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Send Mail <i>(continued from previous page)</i>	<pre><SMTPPassword > <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </SMTPPassword> <MultipleEmails state="True"/> <SendViaSMTP state="True"/> <SMPTPEncryptionType type="encryptionVal"> <SMTPAuthenticationType type=" "SMTPAuthenticationPlain"/> </Step></pre>		
Fields	Set Next Serial Value	<pre><Step id="116" name="Set Next Serial Value" enable="True"> <StepText>Script step text</StepText> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[12]]> </Calculation> <Field name="f3" id="2" table="test"/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step></pre>	<pre><Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	—
Miscellaneous	Send Event (Mac)	See Send Event (Win).	See Send Event (Win).	—
Miscellaneous	Perform AppleScript (Mac)	<pre><Step id="67" name="Perform AppleScript" enable="True"> <StepText>Script step text</StepText> <ContentType value="Calculation"> <CompiledScript> <![CDATA[{compiled apple script data}]]> </CompiledScript> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["this is a calculated string"]]> </Calculation> <Text>This is a string literal</Text> </Step></pre>	<pre><ContentType value> can be: ■ Calculation ■ Text <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef</pre>	<pre><Calculation> is present when <ContentType value> is "Calculation" and <Text> is present when it is "Text".</pre>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Send DDE Execute (Win)	<pre> <Step id="64" name="Send DDE Execute" enable="True"> <StepText>Script step text</StepText> <ContentType value="Calculation"> <UniversalPathList>{PathList} </UniversalPathList> <ServiceName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Word"]]> </Calculation> </ServiceName> <Topic> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["TopicText"]]> </Calculation> </Topic> <Command> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Delete All"]]> </Calculation> </Command> </Step> </pre>	<p><ContentType value> can be:</p> <ul style="list-style-type: none"> ■ File ■ Calculation <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><UniversalPathList> is present when <ContentType value> is "File" and <Topic> is present when it is "Calculation".</p> <p>{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
Miscellaneous	Execute SQL	<pre> <Step id="117" name="Execute SQL" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> {See ODBC data source profile element in Import Records step} </Step> </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p>{See ODBC data source profile element in Import Records step}</p>	<p>{See ODBC data source profile element in Import Records step}</p>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Miscellaneous	Send Event (Win)	<pre><Step id="57" name="Send event" enable="True"> <StepText>Script step text</StepText> <ContentType value="Calculation"> <UniversalPathList>{PathList} </UniversalPathList> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation>{CalcString}</Calculation> <Text>{TextString}</Text> <Event class={class} id={id} TargetName={TargetName} TargetType={TargetType} BringTargetToForeground="True" WaitForCompletion="True" CopyResultToClipboard="False"/> </Step></pre>	<p><ContentType value> can be:</p> <ul style="list-style-type: none"> ■ File ■ Calculation ■ Text <p><Event class>, <Event id>, and <Event TargetType> are four character Apple Event related strings.</p> <p><Event BringTargetToForeground> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Event WaitForCompletion> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Event CopyResultToClipboard> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><UniversalPathList> is present when <ContentType value> is "File", <Calculation> is present when it is "Calculation", and <Text> is present when it is "Text". {PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.</p>
Miscellaneous	Comment	<pre><Step id="89" name="Comment" enable="True"> <StepText>Script step text</StepText> <Text>This is a comment</Text> </Step></pre>	—	—
Miscellaneous	Flush Cache to Disk	<pre><Step id="102" name="Flush Cache to Disk" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Miscellaneous	Exit Application	<pre><Step id="44" name="Exit Application" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Open Menu Item	Open Find/Replace	<pre><Step id="129" name="Open Find/Replace" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Editing	Perform Find/Replace	<pre> <Step id="128" name="Perform Find/Replace" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <FindReplaceOperation type="FindNext" direction="Forward" MatchCase="False" MatchWholeWords="False" AcrossOptions="All" WithinOptions="All"/> <FindCalc> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </FindCalc> <ReplaceCalc> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </ReplaceCalc> </Step> </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><FindReplaceOperation type> can be:</p> <ul style="list-style-type: none"> ■ FindNext ■ ReplaceAndFind ■ Replace ■ ReplaceAll <p><FindReplaceOperation direction> can be:</p> <ul style="list-style-type: none"> ■ Forward ■ Backward ■ All <p><FindReplaceOperation MatchCase> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><FindReplaceOperation MatchWholeWords> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><FindReplaceOperation AcrossOptions> can be:</p> <ul style="list-style-type: none"> ■ All ■ Current <p><FindReplaceOperation WithinOptions> can be:</p> <ul style="list-style-type: none"> ■ All ■ Current <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Windows	New Window	<pre> <Step id="122" name="New Window" enable="True"> <StepText>Script step text</StepText> <Name> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["WindowName"]]> </Calculation> </Name> <Height> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[200]]> </Calculation> </Height> <Width> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[400]]> </Calculation> </Width> <DistanceFromTop> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[100]]> </Calculation> </DistanceFromTop> <DistanceFromLeft> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[125]]> </Calculation> </DistanceFromLeft> <AdvancedStyles> <Mode AlwaysOnTop="Yes" Resizable="Yes"> Document</Mode> <Button enable="True">Close</Button> <Button enable="True">Minimize</Button> <Button enable="True">Maximize</Button> </AdvancedStyles> </Step> </pre>	<pre> <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef <Mode> can be: ■ Document ■ Dialog <Mode AlwaysOnTop> can be: ■ True ■ False <Mode Resizable> can be: ■ True ■ False <Button enable> can be: ■ True ■ False </pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Windows	Select Window	<pre><Step id="123" name="Select Window" enable="True"> <StepText>Script step text</StepText> <Window value="ByName"/> <LimitToWindowsOfCurrentFile state="True"/> <Name> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Customer Name"]]> </Calculation> </Name> </Step></pre>	<p><Window value> can be:</p> <ul style="list-style-type: none"> ■ Current ■ ByName <p><LimitToWindowsOfCurrentFile state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<Name> is present when <Window value> is "ByName".
Windows	Move/Resize Window	<pre><Step id="119" name="Move/Resize Window" enable="True"> <StepText>Script step text</StepText> <Window value="Current"/> <LimitToWindowsOfCurrentFile state="True"/> {See New Window for remaining XML} </Step></pre>	<p><Window value> can be:</p> <ul style="list-style-type: none"> ■ Current ■ ByName <p><LimitToWindowsOfCurrentFile state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p>{See New Window for remaining details.}</p>	{See New Window.}
Windows	Set Window Title	<pre><Step id="124" name="Set Window Title" enable="True"> <StepText>Script step text</StepText> <Window value="ByName"/> <LimitToWindowsOfCurrentFile state="True"/> <Name> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Customer Name"]]> </Calculation> </Name> <NewName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["New Title"]]> </Calculation> </NewName> </Step></pre>	<p><Window value> can be:</p> <ul style="list-style-type: none"> ■ Current ■ ByName <p><LimitToWindowsOfCurrentFile state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<Name> is present when <Window value> is "ByName".
Windows	Arrange All Windows	<pre><Step id="120" name="Arrange All Windows" enable="True"> <StepText>Script step text</StepText> <WindowArrangement value="TileHorizontally"/> </Step></pre>	<p><WindowArrangement Value> can be:</p> <ul style="list-style-type: none"> ■ TileHorizontally ■ TileVertically ■ Cascade ■ BringAllToFront (Mac specific) 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Windows	Close Window	<pre><Step id="121" name="Close Window" enable="True"> <StepText>Script step text</StepText> <Window value="ByName"/> <LimitToWindowsOfCurrentFile state="True"/> <Name> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Customer Name"]]> </Calculation> </Name> </Step></pre>	<p><Window value> can be:</p> <ul style="list-style-type: none"> ■ Current ■ ByName <p><LimitToWindowsOfCurrentFile state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<Name> is present when <Window value> is "ByName".
Open Menu Item	Open Manage Data Sources	<pre><Step id="140" name="Open Manage Data Sources" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Records	Open Record/Request	<pre><Step id="133" name="Open Record/Request" enable="True"> <StepText>Script step text</StepText> </Step></pre>	—	—
Control	Else If	<pre><Step name="Else If" id="125" enable="True"> <StepText>Script step text</StepText> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation>CalcString</Calculation> </Step></pre>	<p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Insert File	<pre> <Step id="131" name="Insert File" enable="True"> <StepText>Script step text</StepText> <UniversalPathList type="Reference">{PathList} </UniversalPathList> <Field name="{FieldName}" id="2" table="{Table}"> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> <DialogOptions asFile="True" enable="True"> <Storage type="UserChoice"/> <Compress type="UserChoice"/> <FilterList> <Filter id="0"> <name> <Calculation> <![CDATA["All Files"]]> </Calculation> <DisplayCalculation> <Chunk type="NoRef">&quot;All Files&quot;</Chunk> </DisplayCalculation> </name> <List>*.*)</List> </Filter> </FilterList> </DialogOptions> </Step> </pre>	<p><UniversalPathList type> can be:</p> <ul style="list-style-type: none"> ■ Reference ■ Embedded <p>"Storage type=" can be {</p> <ul style="list-style-type: none"> ■ "UserChoice"; ■ "ReferenceOnly"; ■ "InsertOnly" } <p>"Compress type=" can be {</p> <ul style="list-style-type: none"> ■ "UserChoice"; ■ "Never"; ■ "WhenPossible" } 	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.
Fields	Export Field Contents	<pre> <Step id="132" name="Export Field Contents" enable="True"> <StepText>Script step text</StepText> <AutoOpen state="True"/> <CreateEmail state="True"/> <UniversalPathList>{PathList} </UniversalPathList> <Field name="{FieldName}" id="2" table="{TableName}"> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>	<p><AutoOpen state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><CreateEmail state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	{PathList} can consist of multiple absolute or relative paths, the first valid one of which is used at execution time.

Area	Name	XMLGrammar	XMLValues	XMLDescription
Editing	Set Selection	<pre> <Step id="130" name="Set Selection" enable="True"> <StepText>Script step text</StepText> <StartPosition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </StartPosition> <EndPosition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{CalcString}]]> </Calculation> </EndPosition> <Field name={FieldName} id="2" table={Table}/> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA["Value"]]> </Calculation> </Repetition> </Step> </pre>	<Chunk type> can be: <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Found Sets	Constrain Found Set	<pre> <Step id="126" name="Constrain Found Set" enable="True"> {See Perform Find} </Step> </pre>	{ See Perform Find }	{ See Perform Find }
Found Sets	Extend Found Set	<pre> <Step id="127" name="Extend Found Set" enable="True"> {See Perform Find} </Step> </pre>	{ See Perform Find }	{ See Perform Find }

Area	Name	XMLGrammar	XMLValues	XMLDescription
Account	Add Account	<pre> <ScriptStep id="134" name="Add Account" enable="True"> <StepText>Script step text</StepText> <ChgPwdOnNextLogin value="True"> <AccountName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </AccountName> <Password> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </Password> <PrivilegeSet name={Privilege Set Name} id="1"/> </Step> </pre>	<pre> <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef </pre>	—
Account	Delete Account	<pre> <ScriptStep id="135" name="Delete Account" enable="True"> <StepText>Script step text</StepText> <AccountName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </AccountName> </Step> </pre>	<pre> <Chunk type> can be: ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef </pre>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Account	Reset Account Password	<pre><ScriptStep id="136" name="Reset Account Password" enable="True"> <StepText>Script step text</StepText> <ChgPwdOnNextLogin value="True"> <AccountName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </AccountName> <Password> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </Password> </Step></pre>	<p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Account	Enable Account	<pre><ScriptStep id="137" name="Enable Account" enable="True"> <StepText>Script step text</StepText> <AccountOperation value="Activate"/> <AccountName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </AccountName> </Step></pre>	<p><AccountOperation value> can be:</p> <ul style="list-style-type: none"> ■ Activate ■ Deactivate <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Account	Re-Login	<pre> <ScriptStep id="138" name="Re-Login" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <AccountName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </AccountName> <Password> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[{{CalcString}}]> </Calculation> </Password> </Step> </pre>	<p><NoInteract state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—
Files	Convert File	<pre> <Step id="139" name="Convert File" enable="True"> {See Import Records, except for folder data source options, which Convert File does not have.} </Step> </pre>	<p>{ See Import Records, except for folder data source options, which Convert File does not have. }</p>	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Save Records as PDF <i>(continued from previous page)</i>	<pre> <AllPages state="true"> <PageRange> <From> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </From> <To> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </To> </PageRange> </Pages> </Document> <Security requireOpenPassword="True" requireControlEditPassword="True" controlPrinting="HighResolution" controlEditing="AnyExceptExtracting" enableCopying="True" allowScreenReader="True"> <OpenPassword> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </OpenPassword> <ControlPassword> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </ControlPassword> </Security> <View show="PageOnly" pageLayout="SinglePage" magnification="25"/> </PDFOptions> </Step> </pre>	<pre> <Security controlEditing> can be: ■ NotPermitted ■ InsertingDeletingRotatin ■ Pages ■ FillingInForms ■ Commenting ■ AnyExceptExtractingPages <Security enableCopying> can be: ■ True ■ False <Security allowScreenReader> can be: ■ True ■ False <View show> can be: ■ PageOnly ■ BookmarksPanelAndPage ■ PagesPanelAndPage <View pageLayout> can be: ■ Default ■ SinglePage ■ Continuous ■ Facing ■ ContinuousFacing <View magnification> can be: ■ Default ■ FitPage ■ FitWidth ■ FitVisible ■ 25 ■ 50 ■ 75 ■ 100 ■ 125 ■ 150 ■ 200 ■ 400 ■ 800 </pre>	

Area	Name	XMLGrammar	XMLValues	XMLDescription
Records	Save Records as Excel	<pre> <Step id="143" name="Save Records as Excel" enable="True"> <StepText>Script step text</StepText> <NoInteract state="True"/> <Restore state="True"/> <AutoOpen state="True"/> <CreateEmail state="True"/> <Profile DataType="XLXE" FirstRowsData="True"/> <UniversalPathList>{PathList} </UniversalPathList> <SaveType value="BrowsedRecords"/> <UseFieldNames state="True"/> <WorkSheet> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </WorkSheet> <Title> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Title> <Subject> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Subject> <Author> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Author > </Step> </pre>	<pre> <NoInteract state> can be: ■ True ■ False <Restore state> can be: ■ True ■ False <AutoOpen state> can be: ■ True ■ False <CreateEmail state> can be: ■ True ■ False <SaveType value> can be: ■ BrowsedRecords ■ CurrentRecord <UseFieldNames state> can be: ■ True ■ False <Profile DataType> can be: ■ XLXE <Profile FirstRowsData> can be: ■ True ■ False </pre>	<pre> <Profile> may not be generated if there is no output file specified in the script step. <Profile DataType> value of "XLXE" means export to "Excel workbook (.xlsx)" type. </pre>

Area	Name	XMLGrammar	XMLValues	XMLDescription
Control	Set Variable	<pre> <Step id="141" name="Set Variable" enable="True"> <StepText>Script step text</StepText> <Name>{Variable name}</Name> <Value> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Value> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Repetition> </Step> </pre>	—	—
Miscellaneous	Install Menu Set	<pre> <Step id="142" name="Install Menu Set" enable="True"> <StepText>Script step text</StepText> <UseAsFileDefault state="True"/> <CustomMenuSet id="3" name="{Menu set name}"/> </Step> </pre>	<pre> <UseAsFileDefault state> can be: ■ True ■ False </pre>	—
Control	Go to Object	<pre> <Step id="145" name="Go to Object" enable="True"> <StepText>Script step text</StepText> <ObjectName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </ObjectName> <Repetition> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </Repetition> </Step> </pre>	—	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Control	Set Web Viewer	<pre><Step id="146" name="Set Web Viewer" enable="True"> <StepText>Script step text</StepText> <Action value="Reset"/> <ObjectName> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </ObjectName> <URL custom="True"> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> <Calculation> <![CDATA[CalcString]]> </Calculation> </URL> </Step></pre>	<p><Action value> can be:</p> <ul style="list-style-type: none"> ■ Reset ■ Reload ■ GoForward ■ GoBack ■ GoToURL <p><URL custom> can be:</p> <ul style="list-style-type: none"> ■ True ■ False 	<URL> element is present when <Action value> is "GoToURL".
Open Menu Item	Open Edit Saved Finds	<pre><Step id="149" name="Open Edit Saved Finds" enable="True"> <StepText>Open Edit Saved Finds</StepText> </Step></pre>	—	—
Control	Install OnTimer Script	<pre><Step id="148" name="Install OnTimer Script" enable="True"> <StepText>Script step text</StepText> <Interval> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Interval> <Script id="1" name="Script Name"/> </Step></pre>	<p><Interval> and <Script> will not appear if that option was not specified in the step.</p> <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	—

Area	Name	XMLGrammar	XMLValues	XMLDescription
Fields	Set Field By Name	<pre><Step id="147" name="Set Field By Name" enable="True"> <StepText>Script step text</StepText> <TargetName> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="NoRef"></Chunk> </DisplayCalculation> </TargetName> <Result> <Calculation> <![CDATA[CalcString]]> </Calculation> <DisplayCalculation> <Chunk type="FunctionRef">Abs</Chunk> <Chunk type="NoRef">(13)</Chunk> </DisplayCalculation> </Result> </Step></pre>	<p><TargetName> and <Result> will not appear if that option was not specified in the step.</p> <p><Chunk type> can be:</p> <ul style="list-style-type: none"> ■ NoRef ■ FunctionRef ■ FieldRef ■ CustomFunctionRef 	<p><TargetName> specifies the target field's name.</p> <p><Result> specifies the value to be placed in that field.</p>
Records	Save Records as Snapshot Link	<pre><Step id="152" name="Save Records as Snapshot Link" enable="True"> <CreateEmail state="True"/> <UniversalPathList>{PathList} </UniversalPathList> <SaveType value="BrowsedRecords"/> </Step></pre>	<p><CreateEmail state> can be:</p> <ul style="list-style-type: none"> ■ True ■ False <p><SaveType value> can be:</p> <ul style="list-style-type: none"> ■ BrowsedRecords ■ CurrentRecord 	—

Theme Catalog Section

All nodes below start with <FMPReport><File>

Tag Name	Value	Description
<ThemeCatalog>	—	—
<ThemeCatalog><Theme	—	A theme embedded in a FileMaker file.
id="1"	—	—
internalName="com.filemaker.theme.some_theme"	—	—
version="1"	—	—
locale="en"	Any of the standardized country codes (e.g. "en", "fr", "ja", etc...)	—
name="Some Theme"	—	The display name for the theme.
Group="Some Family">	—	The localized theme family name.